



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO20.2000-2500Nf

20dB, N female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2- 2.5GHz	20dB+/-1	0.7dB	1.20:1	0.25dBmax	22dBmin

Notes:

- Input and output impedance: 50Ω
- Connector: N female 3 places, termination 1 place
- Insertion Loss excludes coupling loss of 0.4dB)
- Power: 200W avg, 2KW peak, 5W max reflected
- Case material: Aluminum alloy with black paint
- Sealed for IP65 waterproof rating
- Weight: 160g
- Operation temperature: -55°C to +85°C

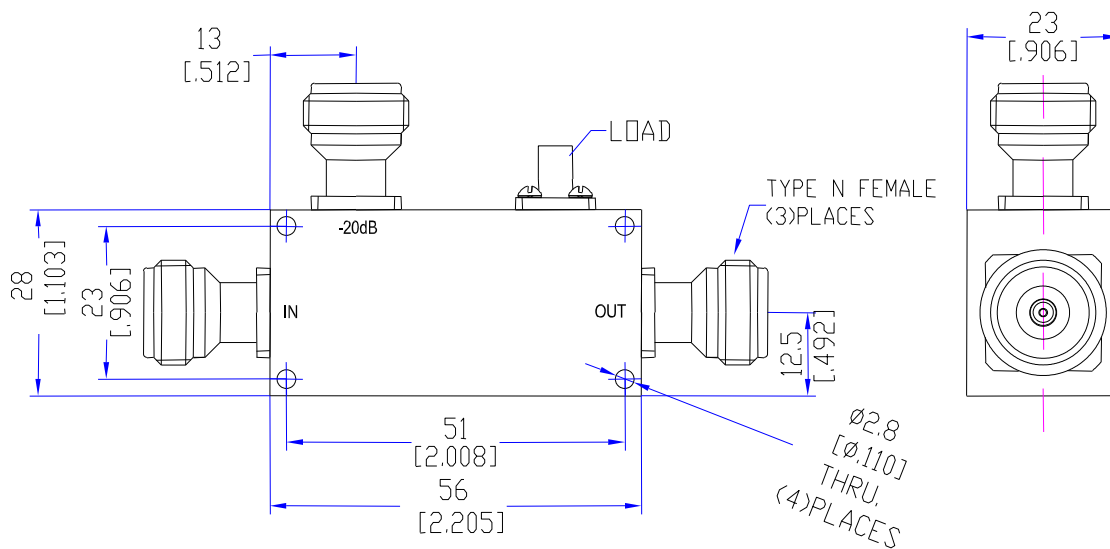

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com