



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Directional Coupler

Model RMCO20.2000-2500Sf


20dB, SMA

### Electrical Specifications:

| Frequency  | Coupling     | Unbalance | VSWR      | Insertion Loss | Directivity | Power  |
|------------|--------------|-----------|-----------|----------------|-------------|--------|
| 2 – 2.5GHz | 20 +/- 1.0dB | +/-1dB    | 1.2:1 max | 0.25dB max     | 22dB min    | 50W CW |

### Notes:

- Input and output impedance: 50  $\Omega$
- Connector: SMA female (4) places
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +85°C
- RoHS Compliant** per Council Directive 2002/95/EC

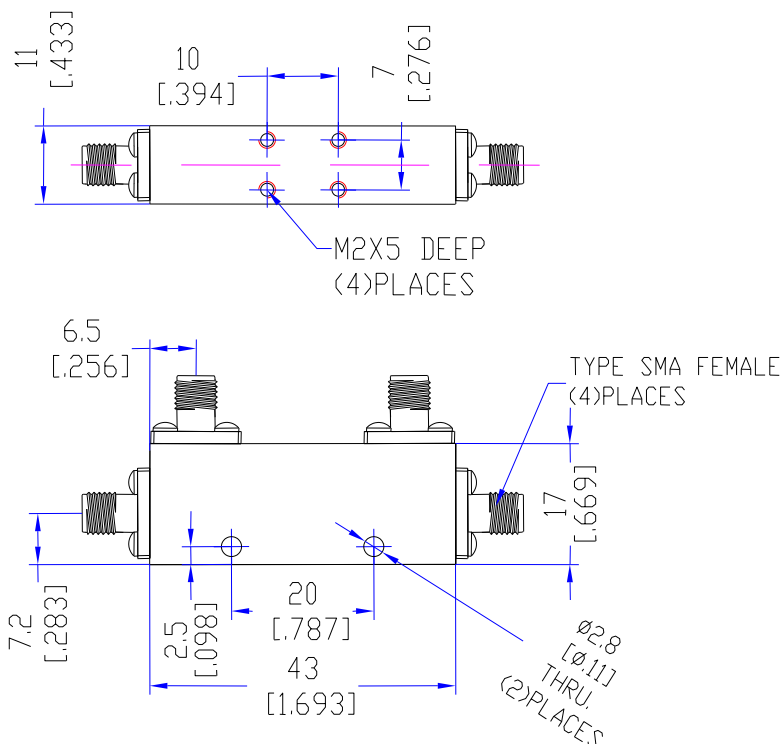

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)