94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.2000-4000Nfa 20dB, N female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2- 4GHz	20dB+/-1	1.0dB	1.25:1	0.3dBmax	20dBmin

Notes:

a. Input and output impedance: 50Ω Ohms
b. Connector: N female 3 places, termination 1 place
c. Power: Average: 200W Peak: 2KW
d. Case material: Aluminum alloy with black paint
e. Operation temperature: -55°C to +85°C

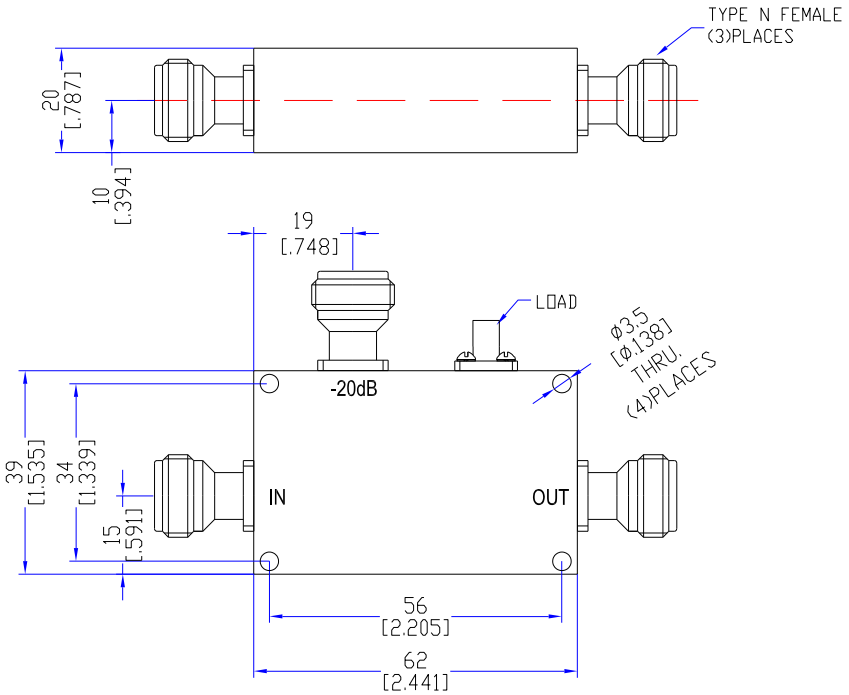

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 12/09/07