94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Dual Directional Coupler

Model RMCO20.500-18000SfDa 20dB SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
0.5 – 18GHz	20dB	+/- 1.0dB	1.45:1	1.2 dB max	12dB min

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 4 places, termination internal**
c. **Power: Forward/Reverse ≤ 30 W avg/ 3KW peak**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -30°C to +85°C**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

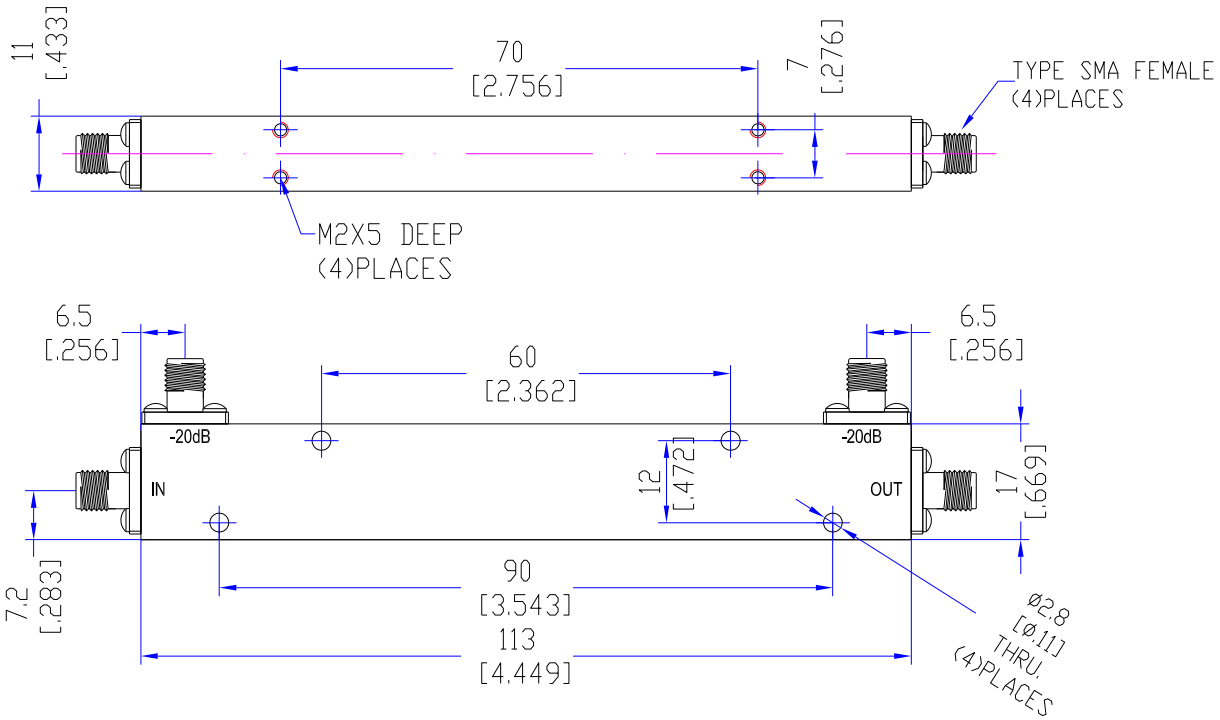

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com