



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO20.5800Sfa

20dB Directional Coupler SMA female

Frequency Range (GHz)	Coupling (dB)	Insertion Loss (dB)	Directivity (dB)	VSWR (dB)	Flatness (dB)
5.7 – 5.9	20	0.5 Max	≥ 20	1.35:1	+/-1 dB

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Power: 150 W
- Case material: Aluminum alloy with iridite plating
- Operation temperature: -35C to +80C deg
- RoHS Compliant part

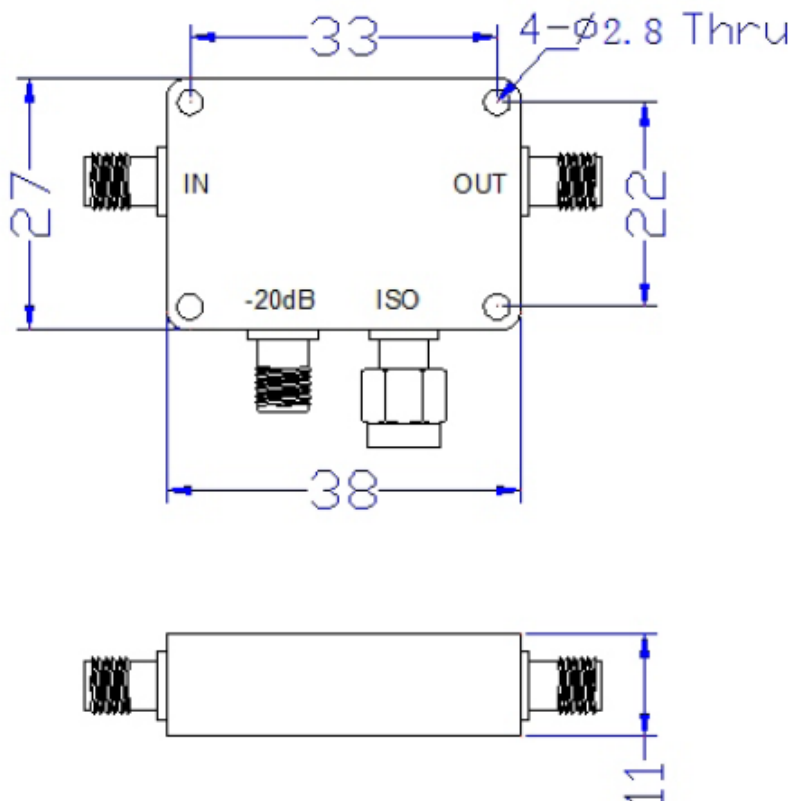

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978772-3768

www.responsemicrowave.com