



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.7500-16000Sf


20dB Coupler - SMA female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
7.5-16GHz	20 ± 0.7dB	0.6dB max	0.7dB max	12dB min	1.50:1	50 Watts CW

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female
- Material: aluminum w/black paint
- Operation temperature: -35 °C to +85°C

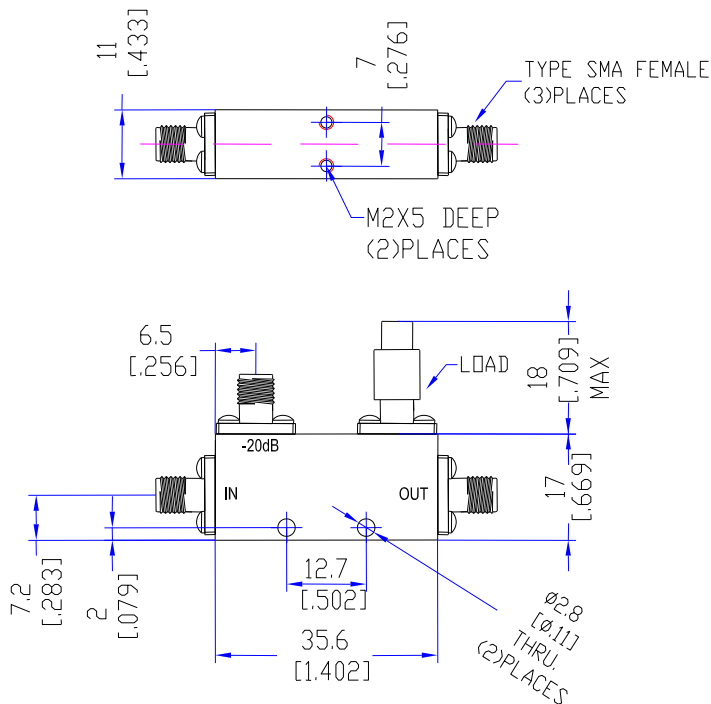

Dimensions in mm. All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com