94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Crossguide

Model RMCO20.8.2-12.5.WR90.UBR100 20dB, WR-90

Frequency	Coupling	Sensitivity	Power	Directivity	VSWR
8.2-12.5GHz	20dB+/-0.75	+/-1dBmax	20W	20dBmin	1.05:1 max primary 1.25:1 max secondary

Notes:

a. **Ports: UBR100 3places**
b. **Case material: aluminum/black paint**
c. **Impedance = 50Ω**
d. **Operation temperature: -55°C to +85°C**
e. **REACH & RoHS Compliant**

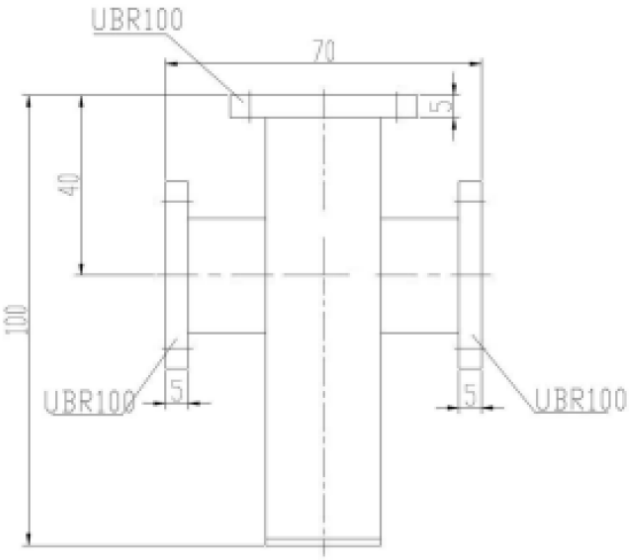

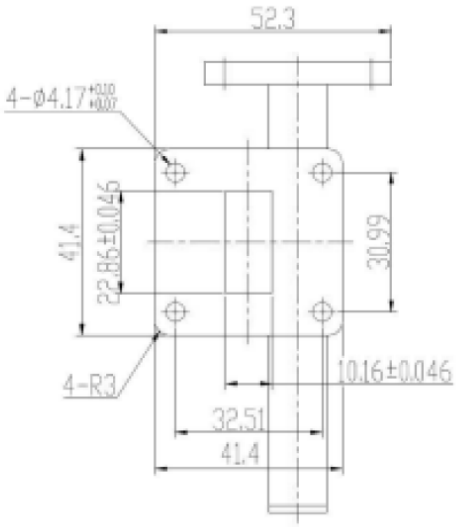

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com