94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.900-2150Sf 20dB Coupler - SMA female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
900-2150MHz	20 ± 0.7dB	0.7dB max	0.4dB max	20dB min	1.20:1	50 Watts CW

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 3 places**
c. **Material: aluminum w/black paint**
d. **Operation temperature: -35ºC to +85ºC**

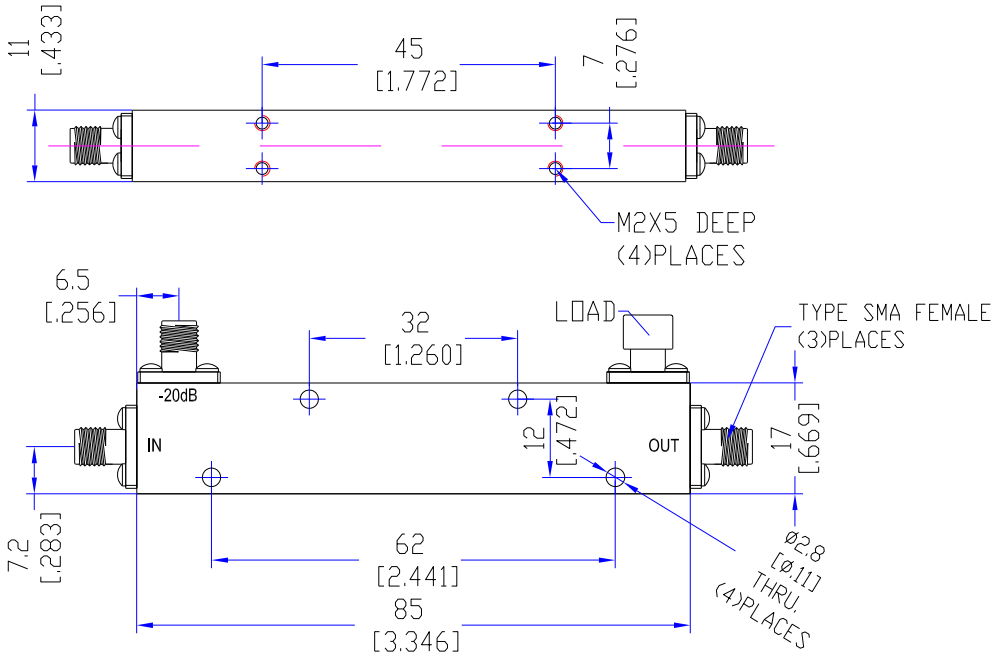

Dimensions in mm. All specifications are subject to change without notice. ***RoHS Compliant***

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com