94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Directional Coupler

## Model RMCO20.950-2450Nf 20dB, N female

| Frequency Range (MHz) | Coupling (dB) | Insertion Loss (dB) | Directivity (dB) | VSWR (dB) | Flatness (dB) |
|---|---|---|---|---|---|
| 950 – 2450 | 20+/-0.7 | 0.4 max | 20 min | 1.20:1 | +/-0.7 |

**Notes:**

a. **Input and output impedance: 50 Ω**
b. **Connector: N female 3 places**
c. **Power: 50W max incident, 2W max reflected**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -55°C to +85°C**
f. **RoHS Compliant part**

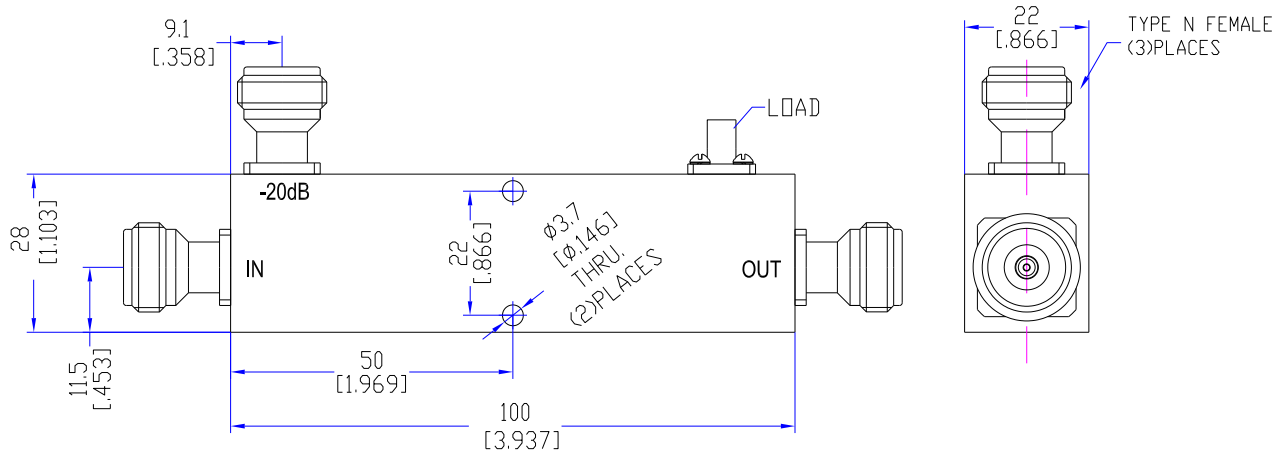


*Dimensions in mm. All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978772-3768**

www.responsemicrowave.com