



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO25.5800SNf

20dB SMA/N female

Frequency Range (GHz)	Coupling (dB)	Insertion Loss (dB)	Directivity (dB)	VSWR (dB)	Flatness (dB)
5.7 – 5.9	25	0.3 max	25 min	1.15:1	+/-1 dB

Notes:

- Input and output impedance: 50 Ohms
- Connector: Coupled Port SMA female, Mainline N female
- Power: 150 W
- Case material: Aluminum alloy with iridite plating
- Operation temperature: -35C to +80C deg
- RoHS Compliant part

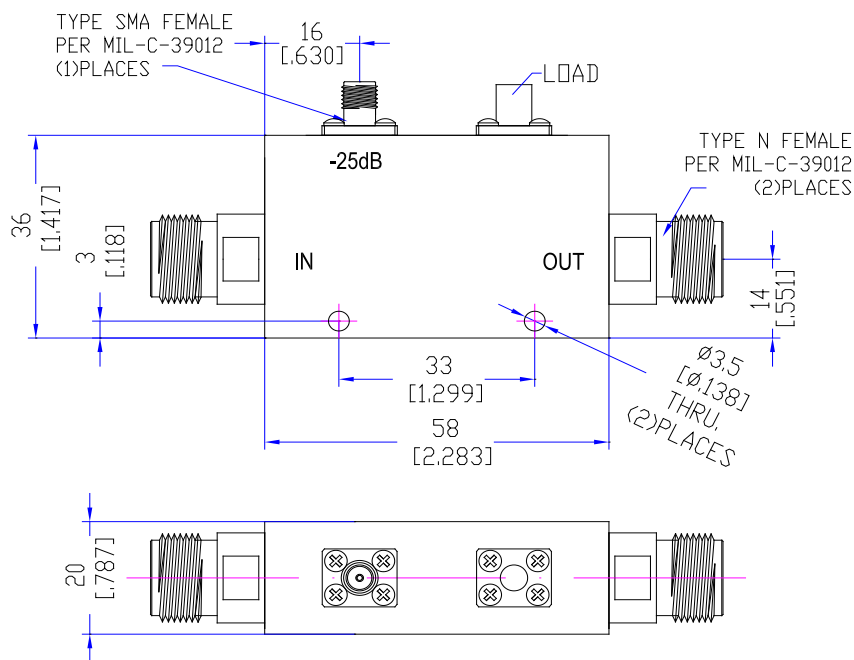

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978772-3768

www.responsemicrowave.com