



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.100-500Nf


30dB Coupler - N female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
100-500MHz	30 ± 1dB	0.5dB max	0.5dB max	20dB min	1.30:1	200 Watts CW

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female
- Material: aluminum w/clear iridite
- Operation temperature: -35 °C to +85°C deg

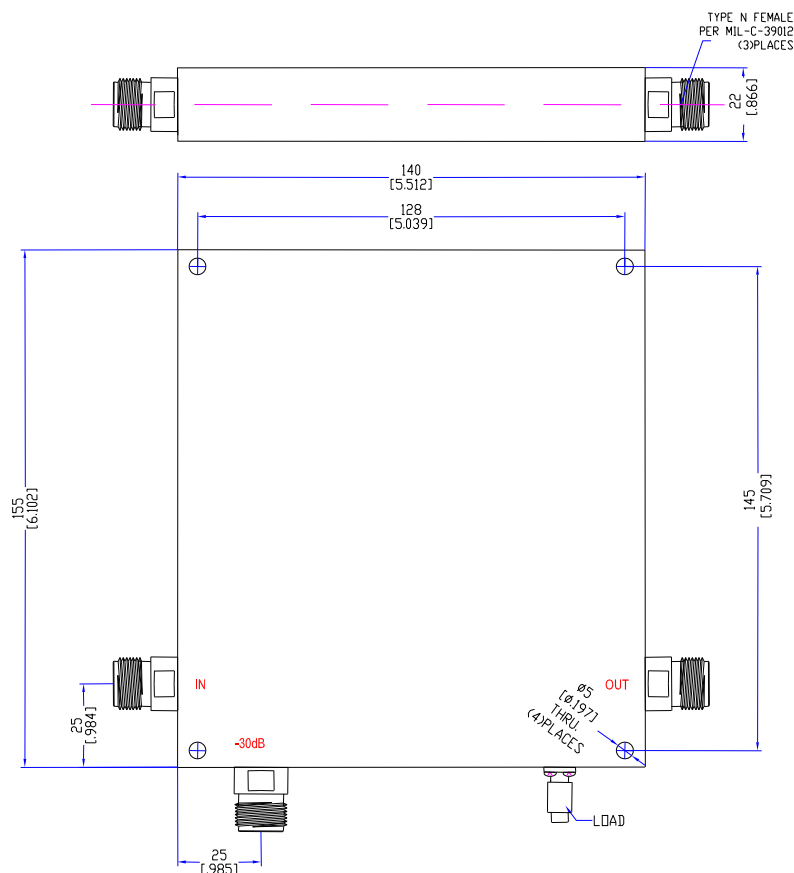

Dimensions in mm. All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com