



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO30.1000-2000SfH

30dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
1- 2GHz	30dB+/-1	+/-1.2dB	1.2:1	0.3dBmax	18dBmin

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places, removable termination 1 place
- Power: Forward/Reverse ≤ 100 W
- Case material: Aluminum alloy with black paint
- Operation temperature: -55°C to +85°C
- Insertion Loss excludes coupling loss of 0.01dB

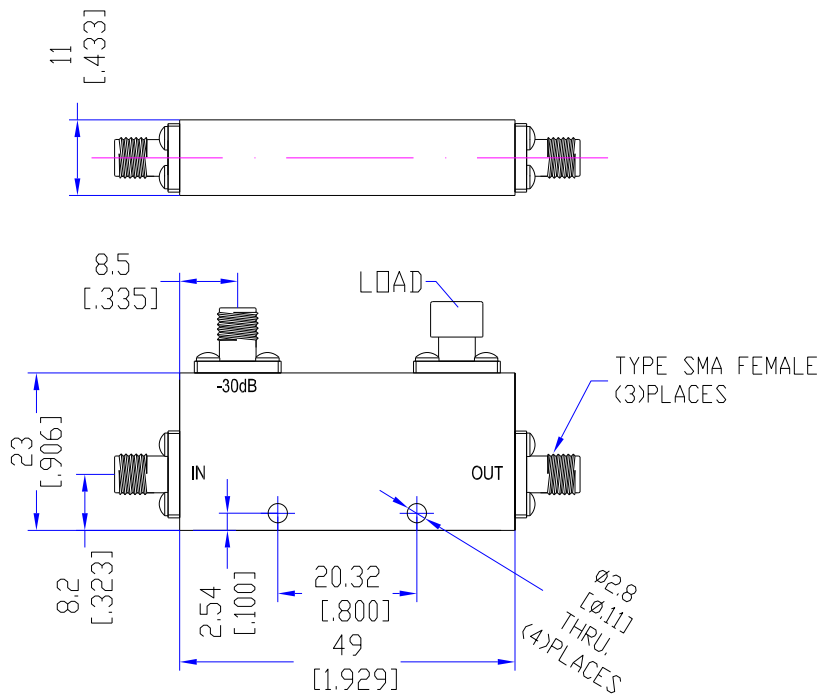

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com