94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Crossguide

Model RMCO30.14.6-15.2.WR75 30dB, WR-75

Frequency	Coupling	Sensitivity	Power	VSWR	Impedance
14.6-15.225GHz	30dB+/-0.5	+/-1.0dBmax	2W	1.10:1 max	50Ω

Notes:

a. **Waveguide: WR-75 – R120**
b. **Case material: Copper alloy/black paint**
c. **Internal Finish: silver plate 3-5u**
d. **M3 pressure inlet port included**
e. **Operation temperature: -55°C to +85°C**
f. **REACH & RoHS Compliant**

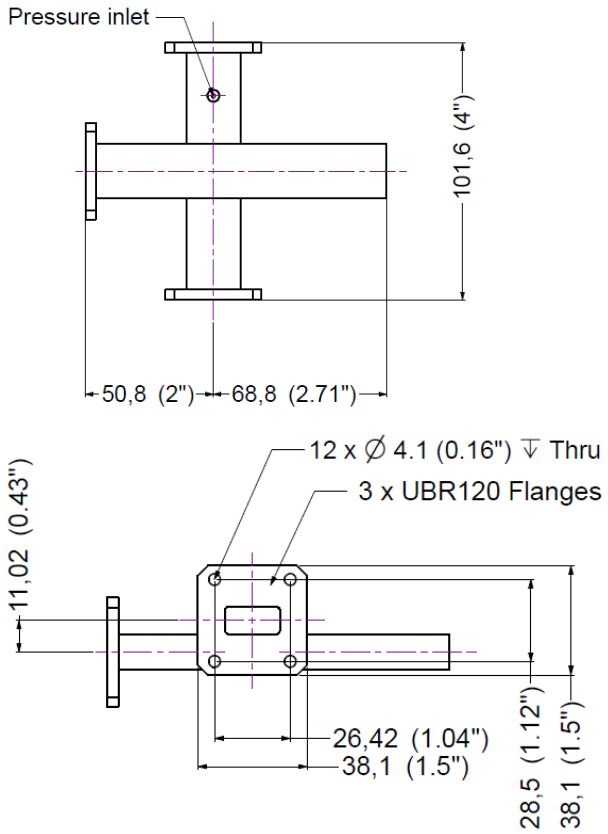

Dimensions in mm/inches. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com