94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.1500.1700Nf 30dB – N female

Electrical Specifications:

Frequency	Coupling	Flatness	Insertion Loss	Directivity	VSWR	Power Handling
1.5-1.7GHz	30 ± 1dB	1dB max	0.3dB max	20dB min	1.25:1	100 Watts CW

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: N female**
c. **Material: aluminum w/black paint**
d. **Operation temperature: -35 ºC to +85ºC**

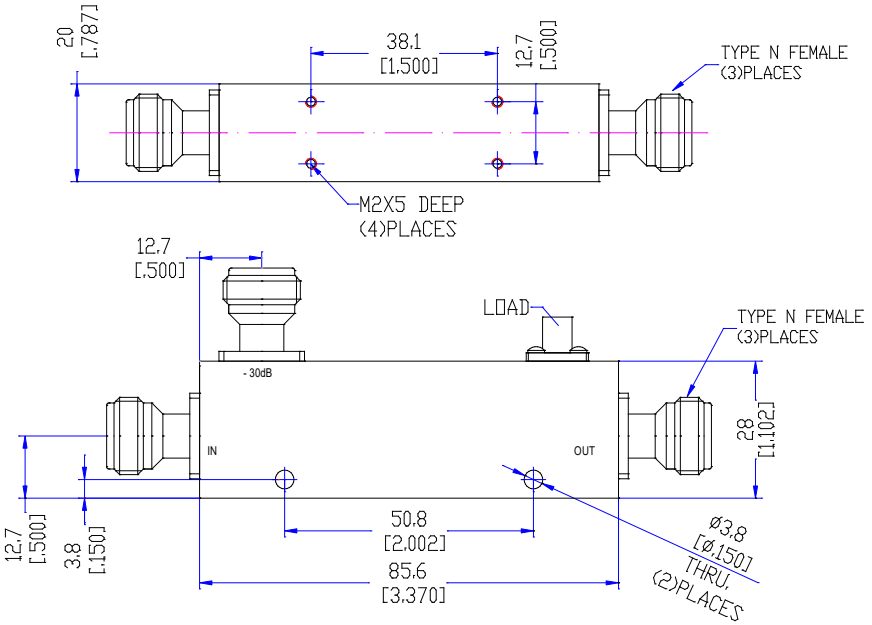

Dimensions in mm. All specifications are subject to change without notice. ***RoHS Compliant***

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com