



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.18000Sf


30dB Directional Coupler SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2-18GHz	30dB+/-1dB	+/- 1dB	1.50:1	0.8dBmax	12dBmin

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, removable termination 1 place
- Power: Forward/Reverse ≤ 50 W avg/ 1KW peak
- Case material: Aluminum alloy with black paint
- Operation temperature: -40C to +70C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
 EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

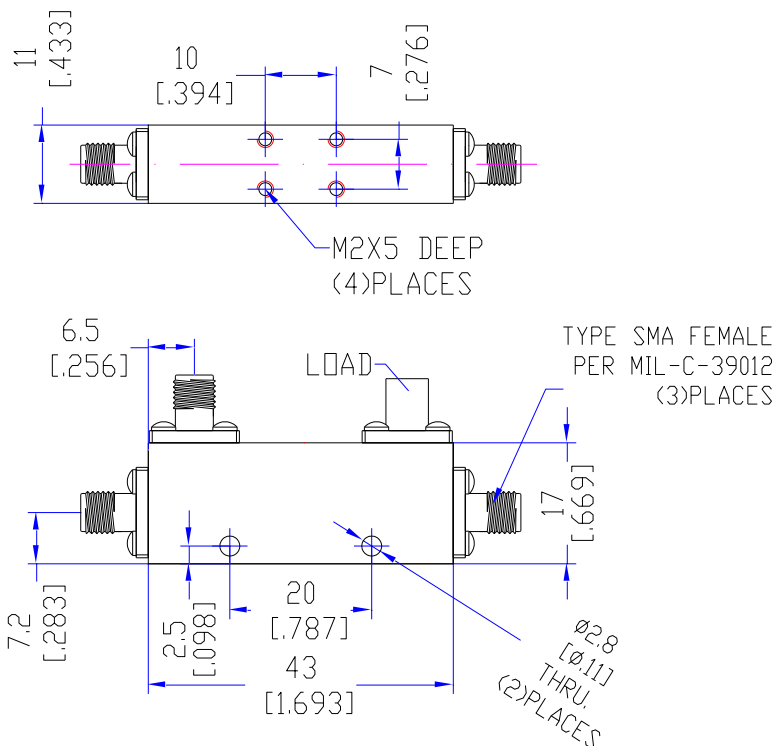

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com