



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.2000.8000Nf


30dB Coupler - N female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
2-8GHz	30 ± 1dB	1dB max	0.4dB max	18dB min	1.40:1	200 Watts CW

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female
- Material: aluminum w/black paint
- Operation temperature: -35 °C to +85°C deg

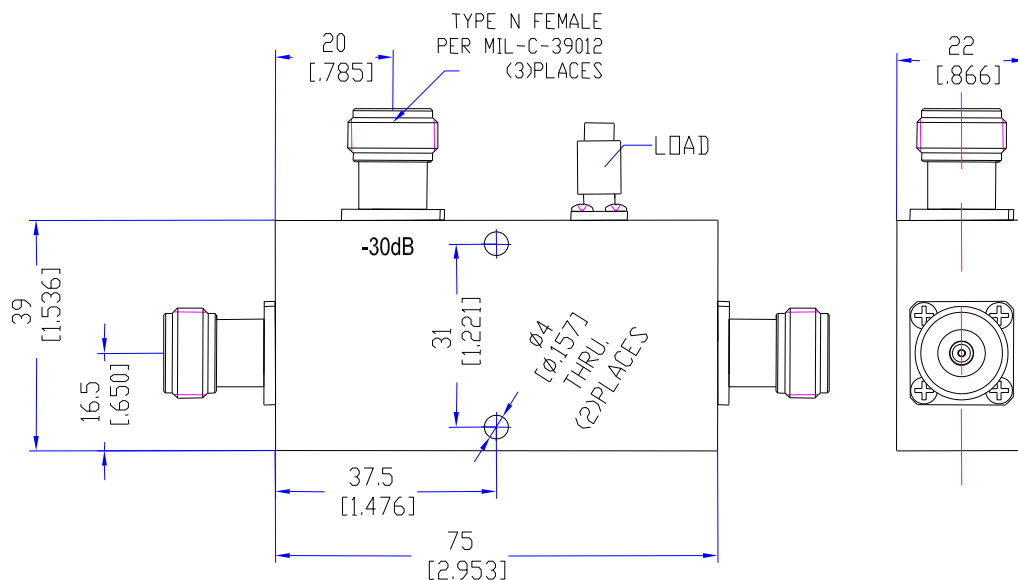

Dimensions in mm. All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com