



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.2000-8000Sf


30dB Directional Coupler SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2- 8GHz	30dB+/-1	+/-0.5dBmax	1.25:1	0.4dBmax	20dBmin

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, termination 1 place
- Power: Forward/Reverse ≤ 50 W, peak ≤ 3 K W
- Case material: Aluminum alloy with black paint
- Operation temperature: -55C to +85C deg
- Specify desired coupling value at "xx"

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

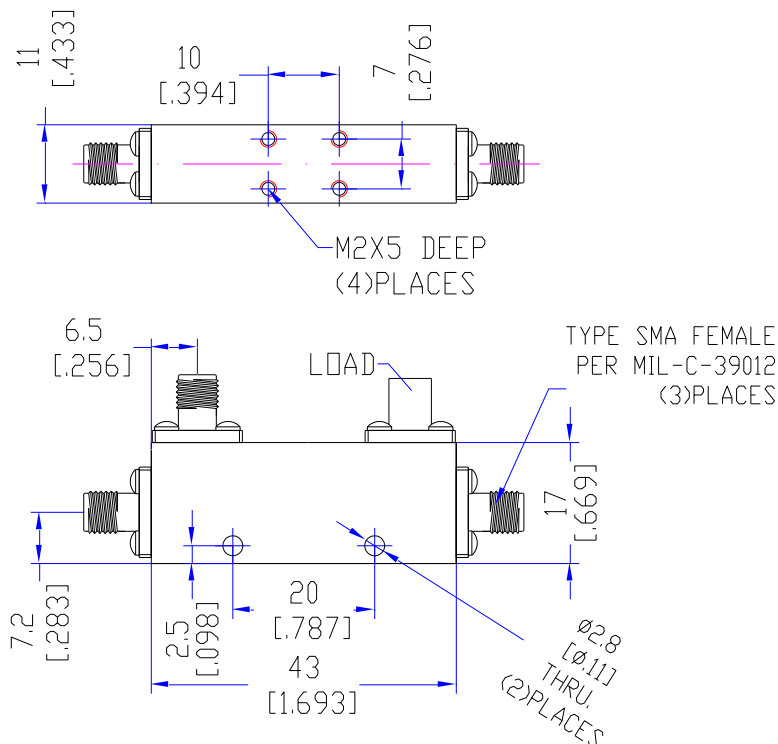

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com