94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.2700-3000Nf 30dB, N female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2.7-3.0GHz	30dB+/-1	+/-1dBmax	1.30:1max	0.3dBmax	18dBmin

Notes:

a. **Input and output impedance: 50 ΩConnector: N female 3 places, termination 1 place**
b. **Power: Incident ≤ 300 W, reflected ≤ 5W**
c. **Case material: Aluminum alloy with black paint**
d. **Operation temperature: -55°C to +85°C**
e. **Specify desired coupling value at "xx"**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: ***EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS***

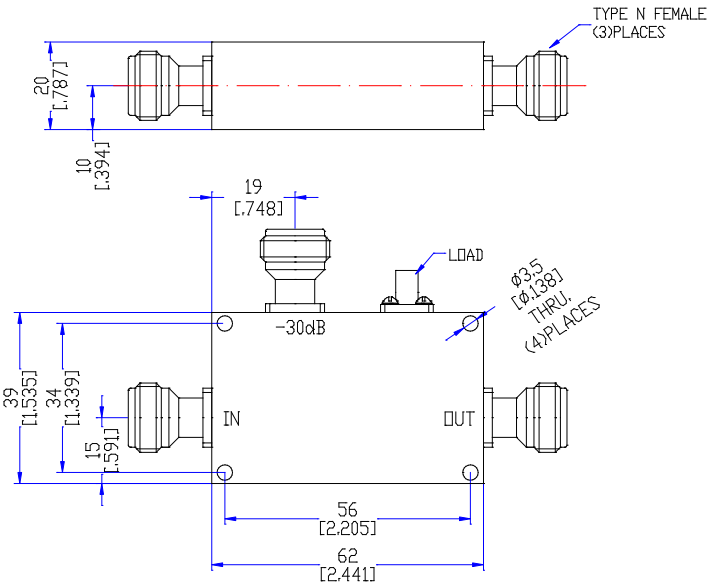

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com