94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.3400-4200SNf 30dB, SMA/N female

Electrical Specifications:

Frequency	Coupling	Insertion Loss	Directivity	VSWR	Unbalance
3.4 – 4.2GHz	30±1dB	0.3dB max	15dB min	1.30:1max	±0.8dB

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: N female, SMA female coupled**
c. **Material: aluminum alloy w/black paint**
d. **Power: 200W incident, 200W reflected**
e. **Operation temperature: -55 ºC to +85ºC**

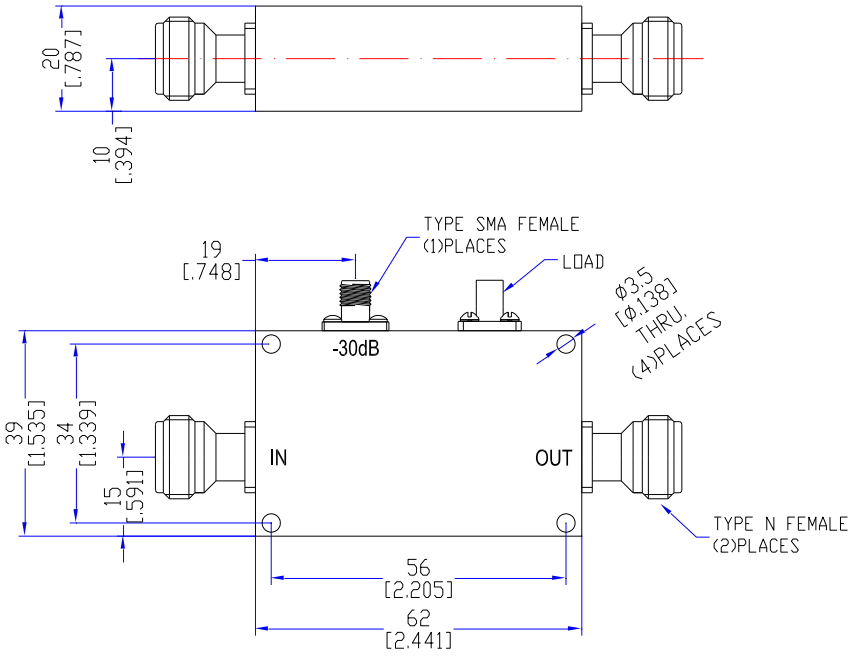

Dimensions in mm and tolerances +/-0.2mm All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com