94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.5800Nfr 30dB, N female

Frequency Range (GHz)	Coupling (dB)	Insertion Loss (dB)	Directivity (dB)	VSWR (dB)	Flatness (dB)
5.7 – 5.9	30	0.4 max	25 min	1.30:1	+/-0.8

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: N female, removeable termination**
c. **Power: 150 W incident, 50W reflected**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -35°C to +80°C**
f. **RoHS Compliant part**

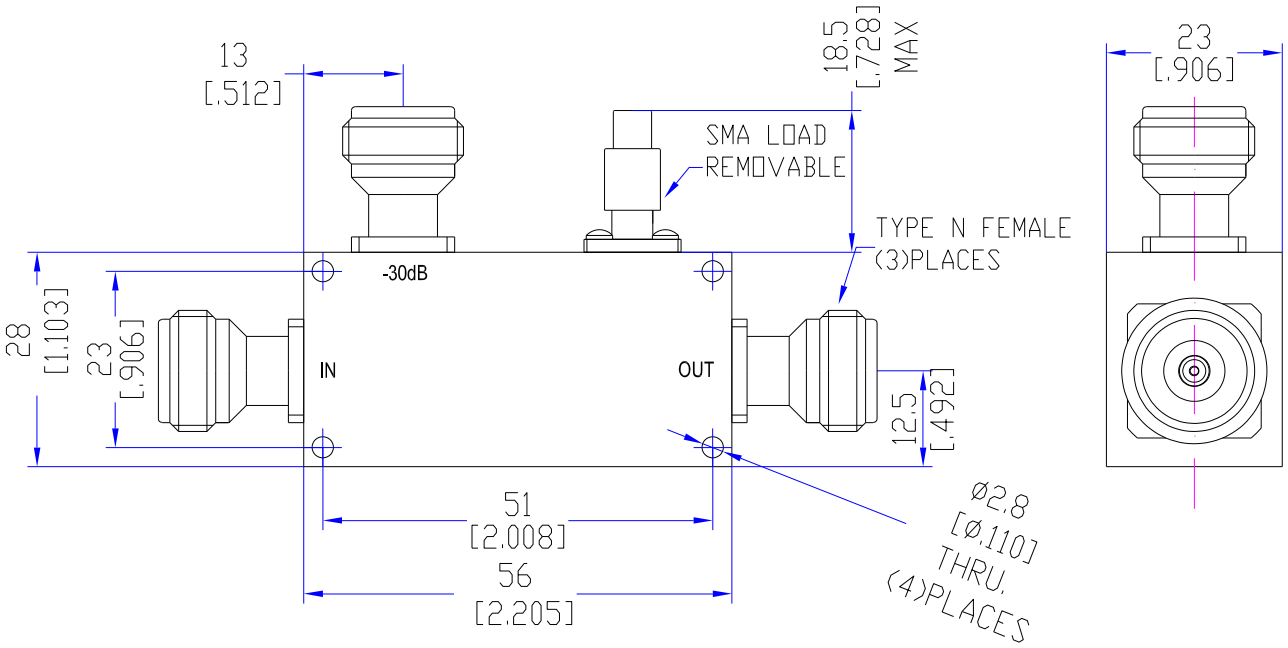

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978772-3768**

www.responsemicrowave.com