



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.6000-18000Sfa


30dB, SMA female

Frequency	Coupling	VSWR	Insertion Loss	Directivity
6 - 18GHz	30dB+/-1dB*	1.4:1 max	0.6dBmax	12dBmin

Notes:

- Input and output impedance: 50Ω
- *Includes coupling and frequency sensitivity
- Connector: SMA female 3 places
- Power: ≤ 30W
- Case material: Aluminum alloy with black paint
- Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applied: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

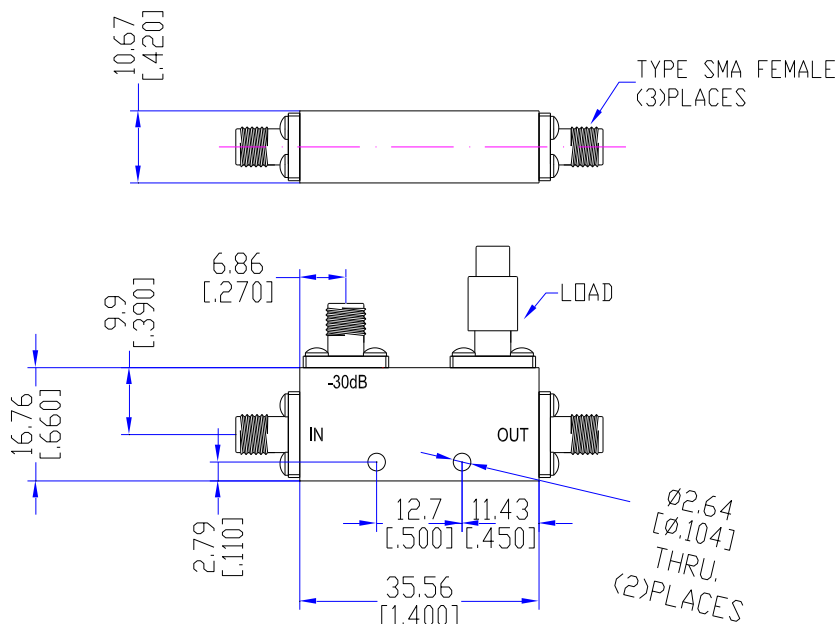

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com