



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.800-2500Sfa


30dB, SMA female, 100W

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
0.8-2.5GHz	$30 \pm 0.6\text{dB}$	0.6dB max	0.3dB max	20dB min	1.2:1	100 Watts CW

Notes:

- Input and output impedance: 50Ω
- Connector: Passivated stainless SMA female 3 places
- Material: aluminum w/black paint
- Operation temperature: -35°C to $+85^\circ\text{C}$
-

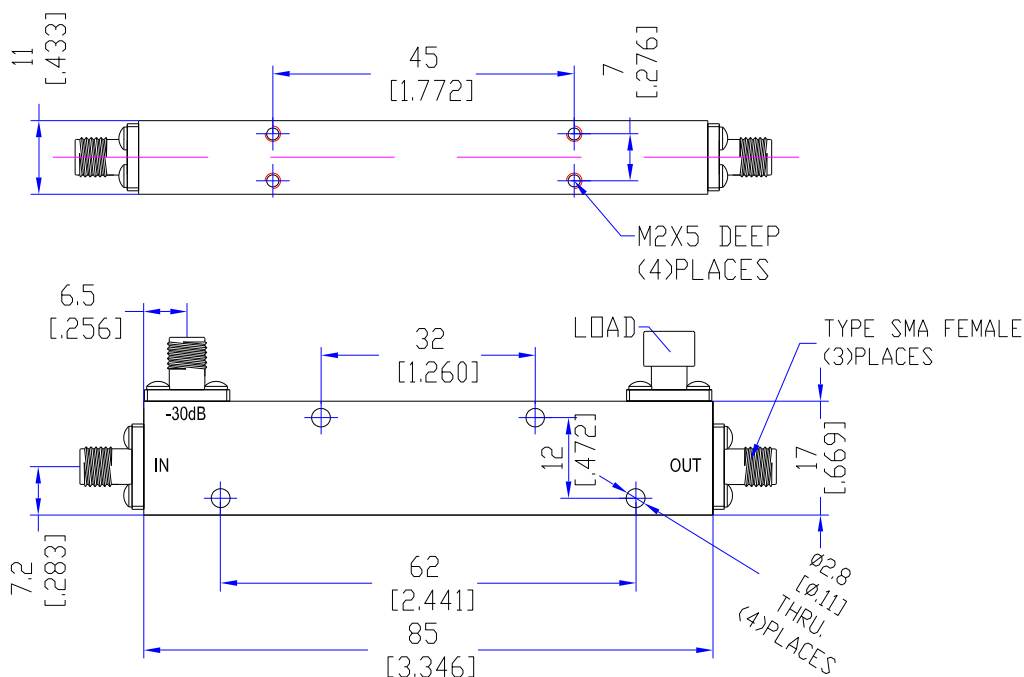

Dimensions in mm. All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com