94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO30.914-916Nfa 30dB, N female

Frequency Range (MHz)	Coupling (dB)	Insertion Loss (dB)	Directivity (dB)	VSWR (dB)	Flatness (dB)
914 – 916	30+/-1	0.2 max	22 min	1.20:1	+/-0.5

Notes:

a. Input and output impedance: 50 Ω
b. Connector: N female 3 places
c. Power: 300W max incident, 50W max reflected
d. Case material: Aluminum alloy with black paint
e. Operation temperature: -30°C to +85°C
f. RoHS Compliant part

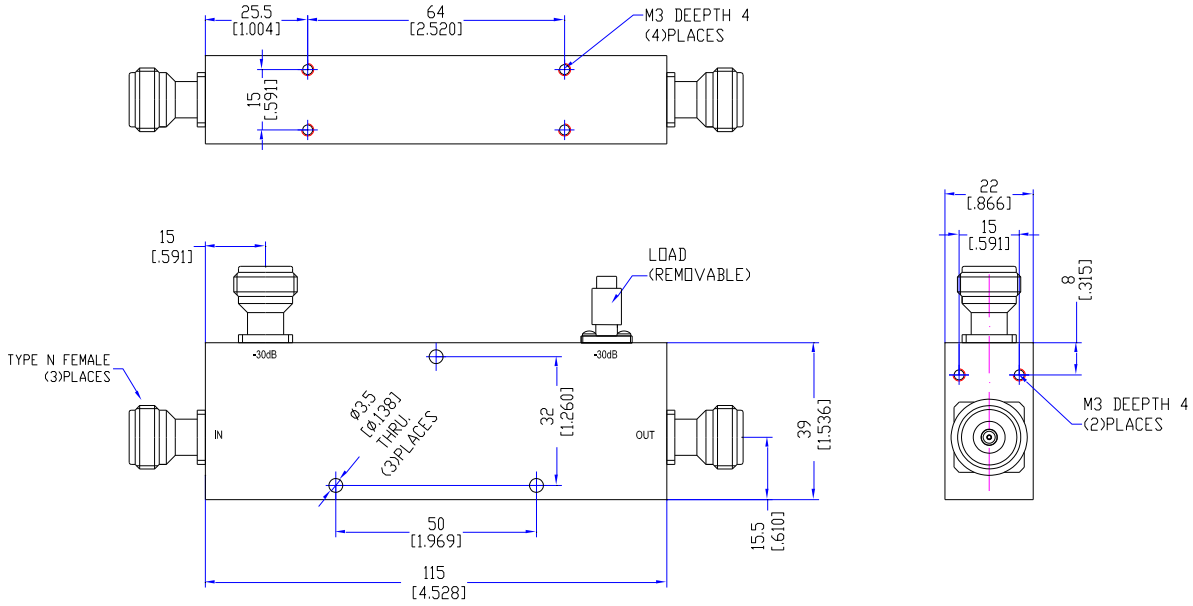

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978772-3768**

www.responsemicrowave.com