94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO40.1000-2000SfHa 40dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
1- 2GHz	40dB+/-1.5	+/-1.5dB	1.2:1	0.3dBmax	18dBmin

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female 3 places, termination 1 place
c. Power: Forward/Reverse ≤ 150 W
d. Case material: Aluminum alloy with black paint
e. Operation temperature: -55°C to +85°C
f. Insertion Loss excludes coupling loss of 0.01dB

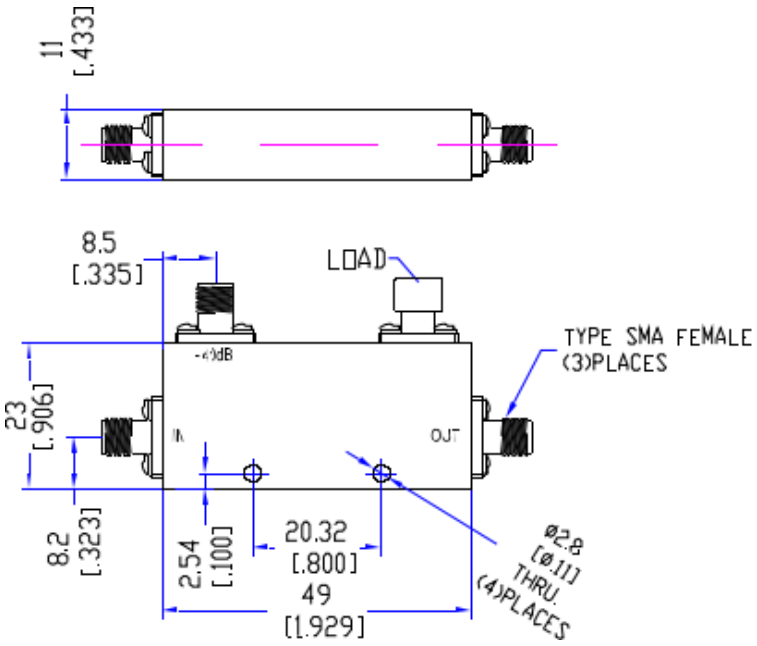

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com