94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler
Crossguide

Model RMCO40.2025-2040.WR430 40dB, WR-430

Frequency	Coupling	Sensitivity	Power	VSWR	Impedance
2.025-2.040GHz	40dB+/-0.5	+/-1.0dBmax	10W	1.10:1 max	50Ω

Notes:

a. **Waveguide: WR-430 – R22**
b. **Case material: Copper alloy/black paint**
c. **Internal Finish: silver plate 3-5u**
d. **Operation temperature: -55°C to +85°C**
e. **REACH & RoHS Compliant**

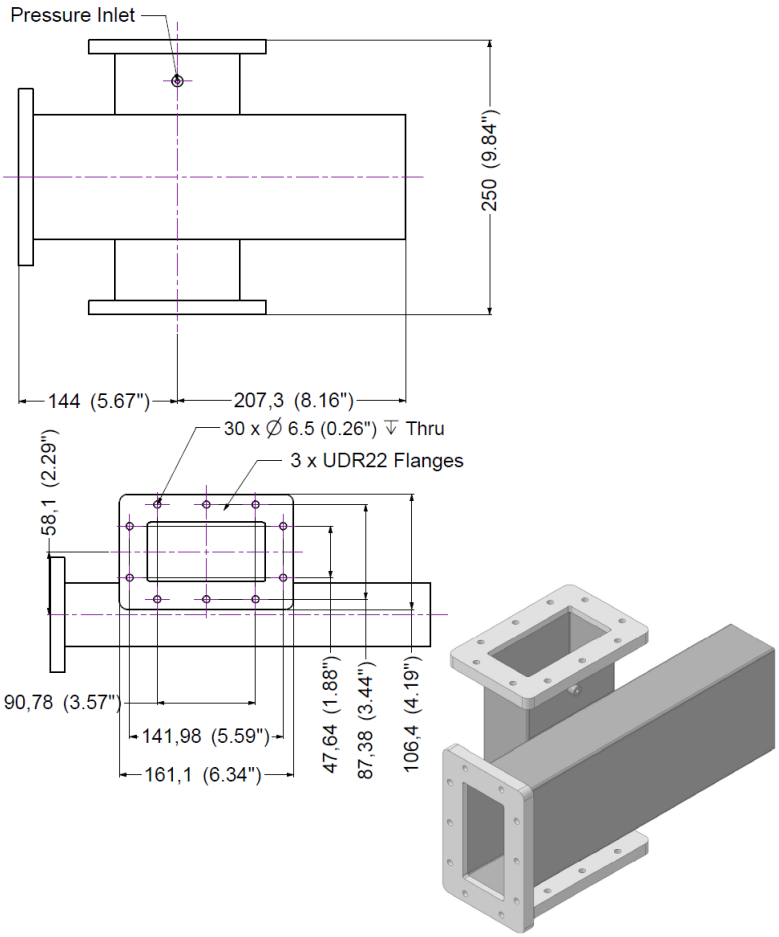

Dimensions in mm/inches. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 5/6/23