94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Crossguide

Model RMCO40.26.5-40.WR28 40dB, WR-28

Frequency	Coupling	Sensitivity	Power	Directivity	Impedance
26.5-40GHz	40dB+/-0.5	+/-1dBmax	2W	20dBmin	50Ω

Notes:

a. **Connector: Coupled = 2.92mm female SS/P, Mainline = WR-28**
b. **Case material: Brass with SS/epoxy coating**
c. **Operation temperature: -55°C to +85°C**
d. **REACH & RoHS Compliant**

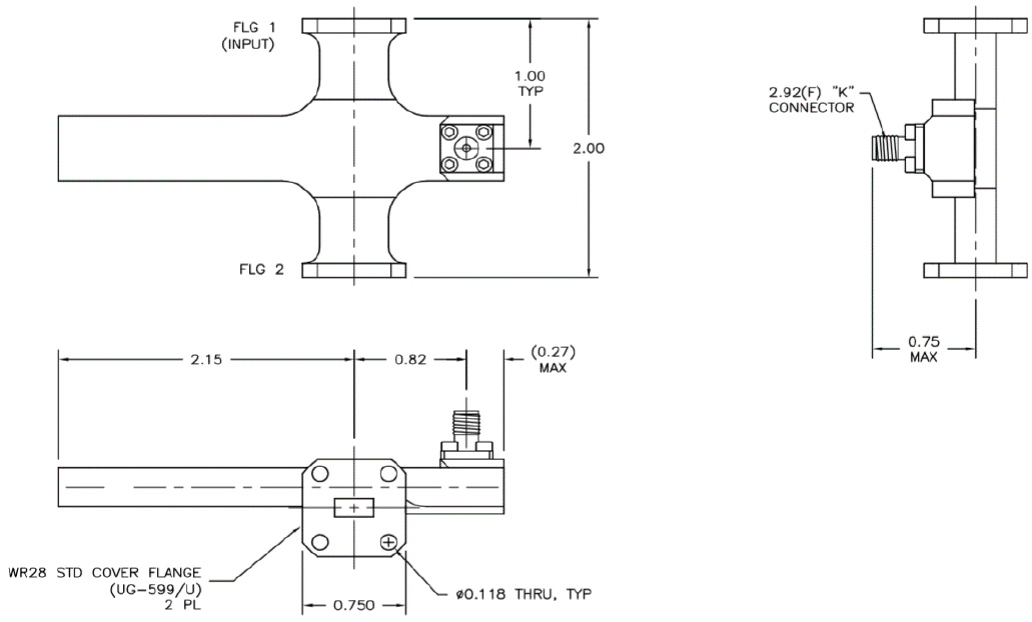

Dimensions in inches. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com