94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO40.800-2800Nf 40dB Coupler - N female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
0.8-2.8GHz	40 ± 2.5dB	1dB max	0.3dB max	18dB min	1.28:1max	500 Watts

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: N female**
c. **Material: aluminum w/golden iridite**
d. **Operation temperature: -20ºC to +85ºC**

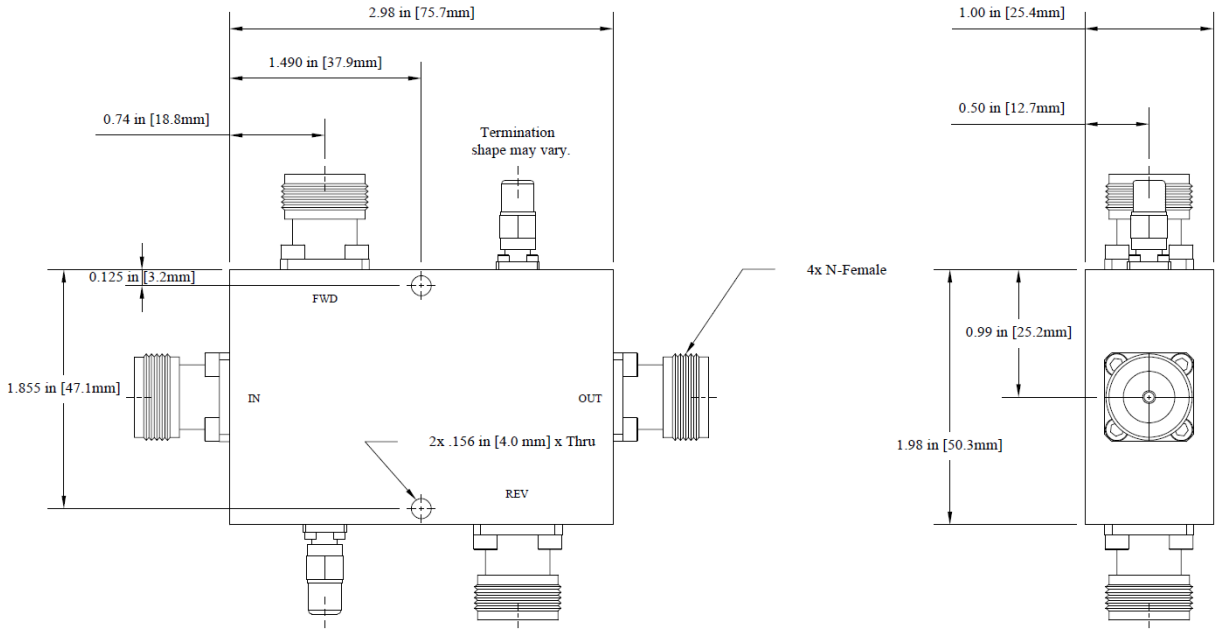

Dimensions in inches. All specifications are subject to change without notice. ***RoHS Compliant***

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com