94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO6.12000-18000Sfr 6dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
12-18GHz	6dB+/-0.7	+/-0.7dBmax	1.4:1	0.7dBmax	12dBmin

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 3 places, removable termination 1 place**
c. **Power: Forward/Reverse ≤ 30 W, peak ≤ 1K W**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -55°C to +85°C**
f. **Specify desired coupling value at "xx"**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: ***EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS***

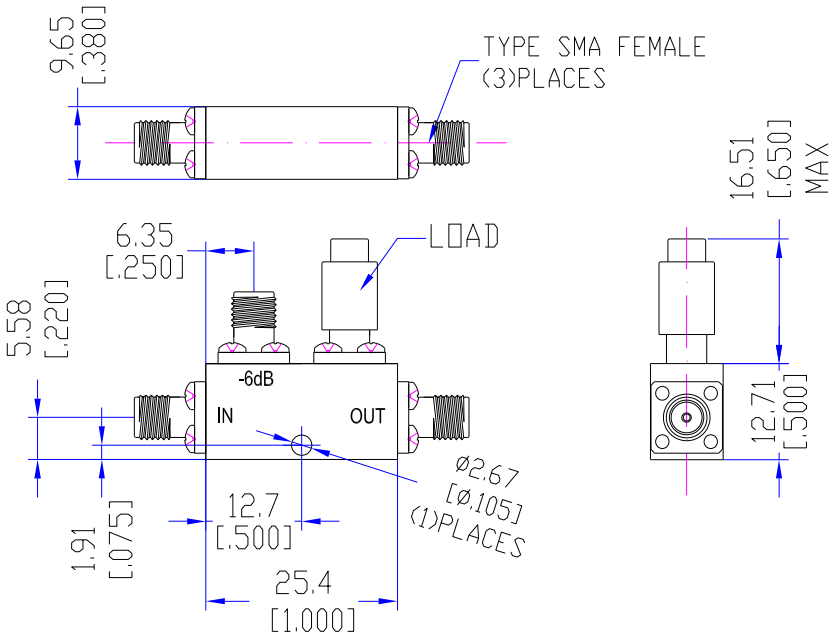

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com