94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO6.17-20Sf 6dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
17 - 20GHz	6dB	+/-0.7dB	1.50:1 max	0.7dBmax	15dBmin

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 3 places, termination 1 place**
c. **Power: Forward/Reverse ≤ 20 W, Peak 3Kw**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -40°C to +70°C**
f. **RoHS compliant**

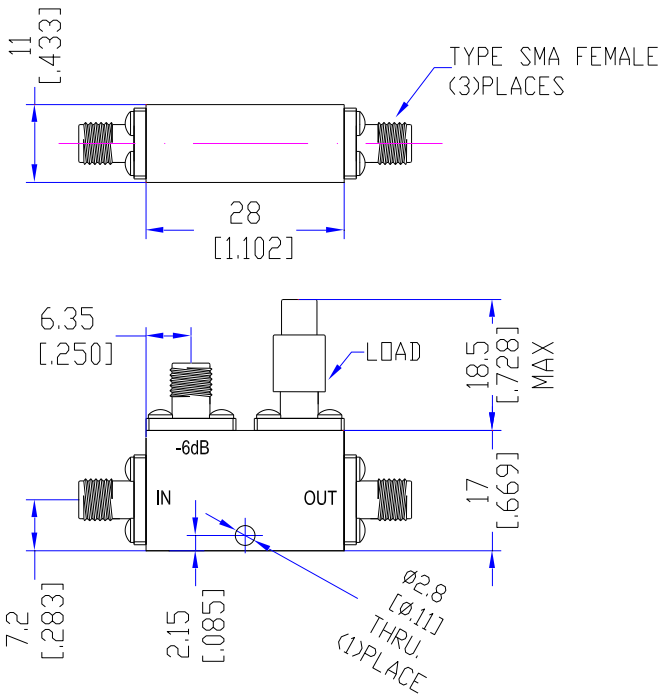

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com