


Model RMC06.2000-4000Sf

6dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2- 4GHz	6dB+/-0.5	0.5dB	1.15:1	0.3dBmax	22dBmin

- a. Input and output impedance: 50Ω Ohms
- b. Connector: SMA female 3 places, termination 1 place
- c. Power: Forward/Reverse ≤ 50 W
- d. Case material: Aluminum alloy with black paint
- e. Operation temperature: -40°C to +70°C

Complies with the requirement set out in the Council Directive 2002/95/EC. The following standards were applied: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

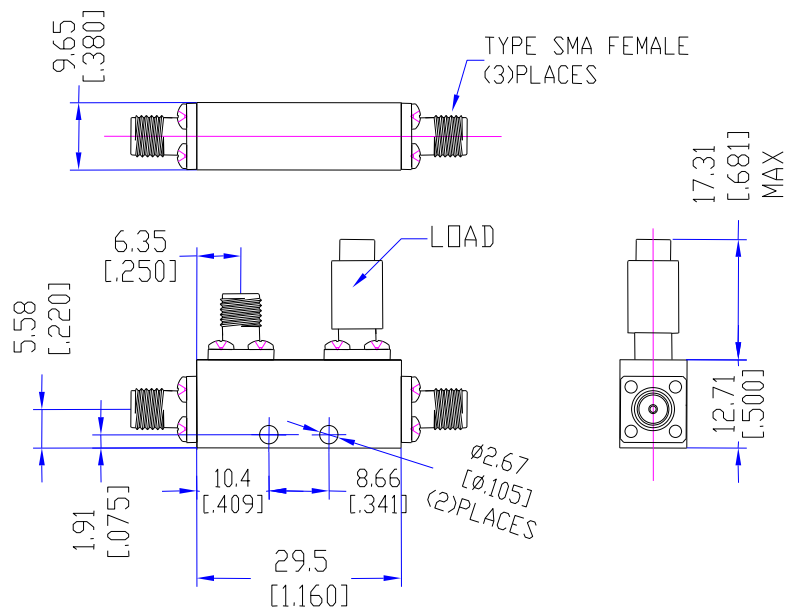

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com