



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO6.4000-8000Sf


6dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
4 - 8GHz	6dB	+/-0.5dB	1.25:1	0.4dBmax	20dBmin

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 3 places, removable termination 1 place
- Power: Forward/Reverse $\leq 50W/\leq 2W$, Peak 3Kw
- Case material: Aluminum alloy with black paint
- Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

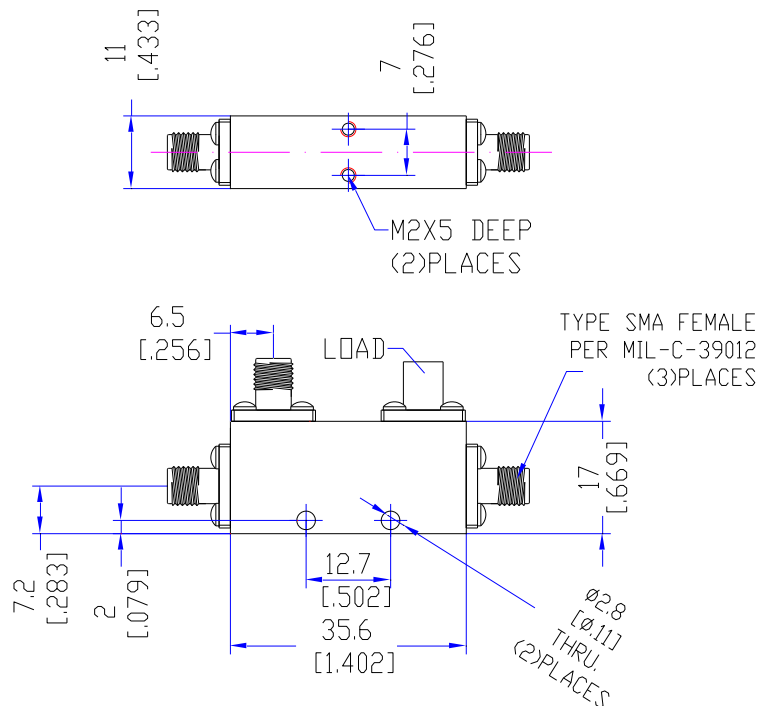

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com