



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO6.500-18000Sf


6dB SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
0.5 – 18GHz	6dB+/-1	+/-1dB	1.50:1	1.6 dB max	12dB min

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places, termination 1 place
- Power: Incident/Reflected <10W/<1W
- Case material: Aluminum alloy with black paint
- Operation temperature: -55°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

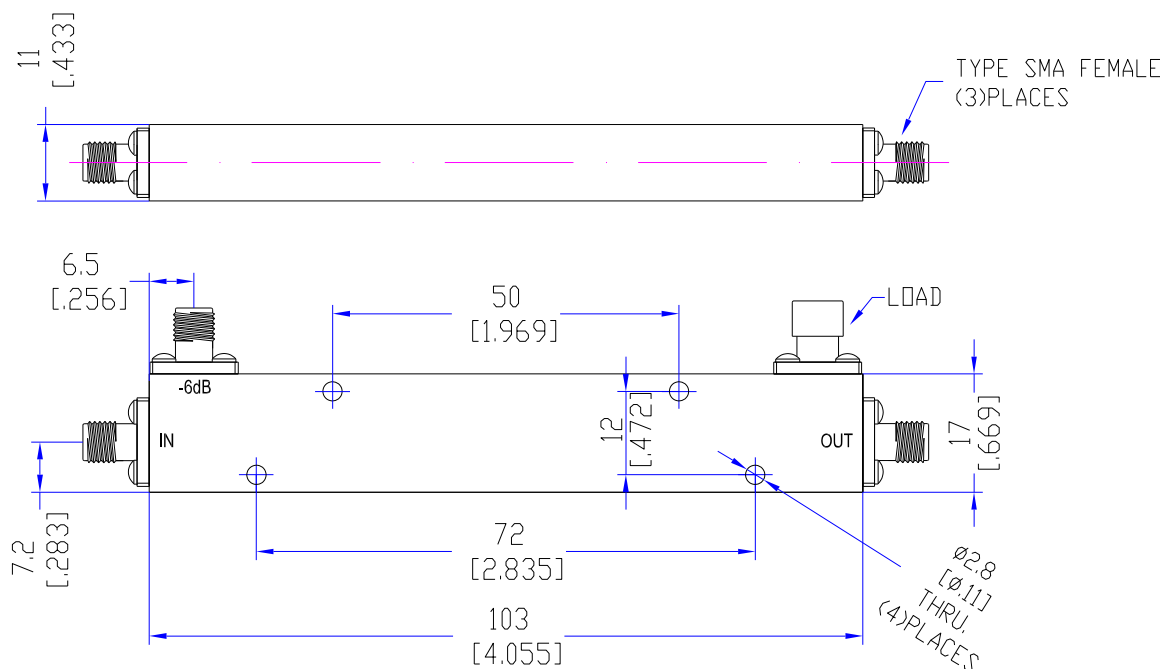

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com