



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO6.8-16Sf


6dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity	Sensitivity
8 - 16GHz	6dB	+/-0.7dB	1.50:1	1.1dBmax	12dBmin	<=/-0.6dB

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places, termination 1 place
- Power: Forward/Reverse ≤ 50 W, Peak 3Kw
- Case material: Aluminum alloy with black paint
- Operation temperature: -55°C to +85°C

*Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS*

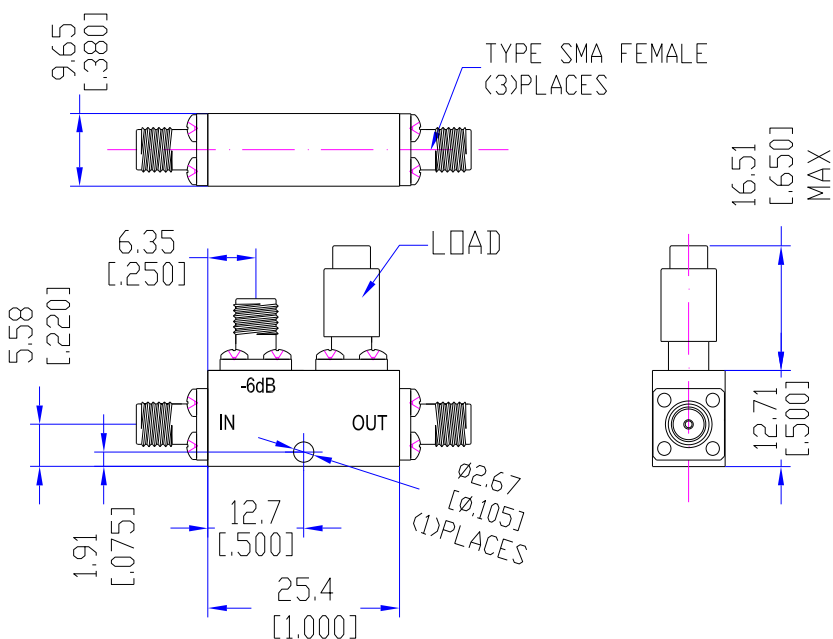

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com