



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Filters/Diplexers

Model RMDU.1525-1660.Nf

DUPLEXER, N Female

SPECIFICATIONS

ITEM		Specification	
Pass Band		Down Link	Up Link
		1525~1559MHz	1626.5~1660.5MHz
Pass Band Insertion Loss		1dB Max.	
Pass Band Ripple		0.6dB Max.	
Pass Band Return Loss		18dB Min.	
Rejection	1660.5~4000MHz	55dB Min.	
	1760~4000MHz		55dB Min.
Isolation (Up Link / Down Link)		90dB Min.	
Power Handling		50W CW	
Operating Temperature		-20°C to +70°C	
Operating Humidity		0 to 95%	
Connector		N(F)	
Size		105 x 13 x 36Max. (mm)	
Finish		Black Epoxy	


Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

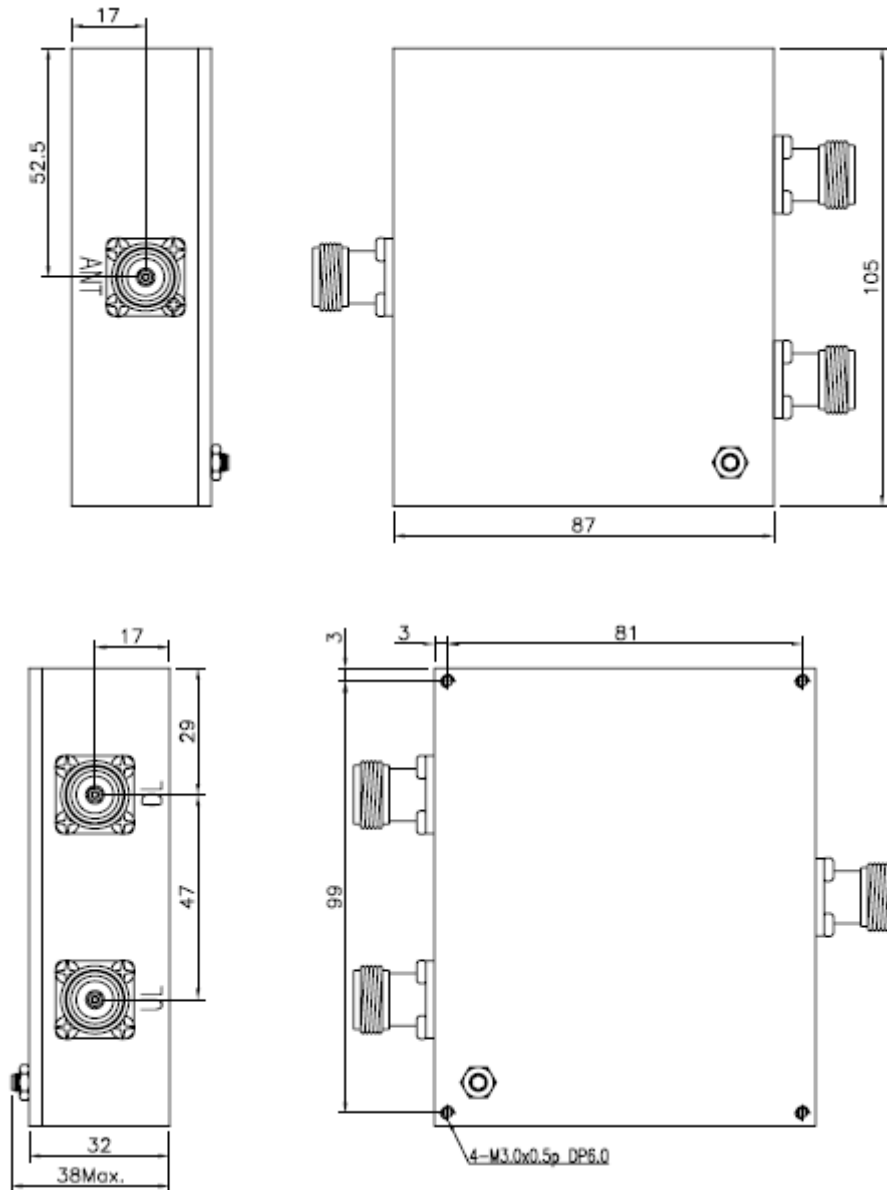

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com