



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Filters/Diplexers


PRELIMINARY

Model RMDU.2200-6000Sf

Diplexer, cavity

SPECIFICATIONS

Parameter	Specification
Frequency Range	Rx = 2200-2500MHz / Tx = 5000-6000MHz
Insertion Loss	1.0dB Max.
VSWR	1.50:1 Min.
Isolation	25dB Min.
Input Power	3W Max.
In/Out Impedance	50Ω
Temp Range	-40 to +85deg C

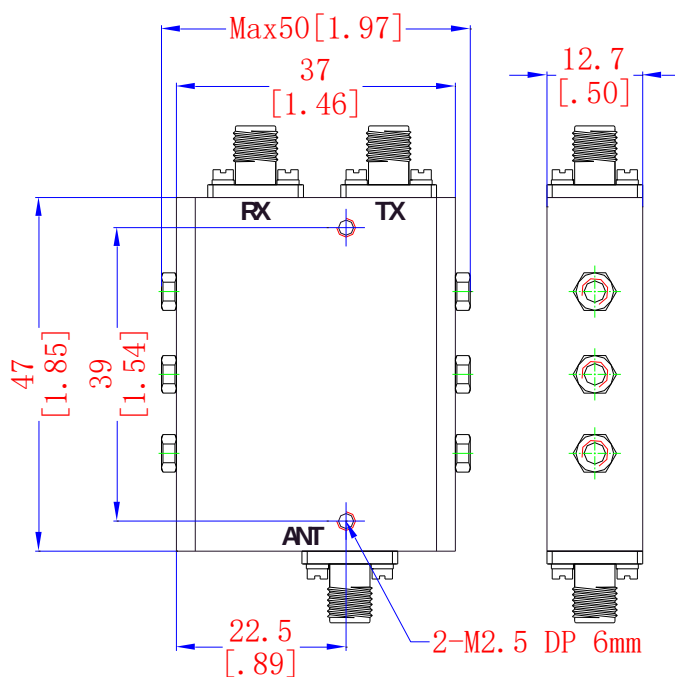

Dimensions in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com