




94 JACKSON ROAD SUITE#110 DEVENS , MA 01434

2.4mm CONNECTORS

DC-50GHz

Model RMC.240.09.ELC

female End Launch - Clamp

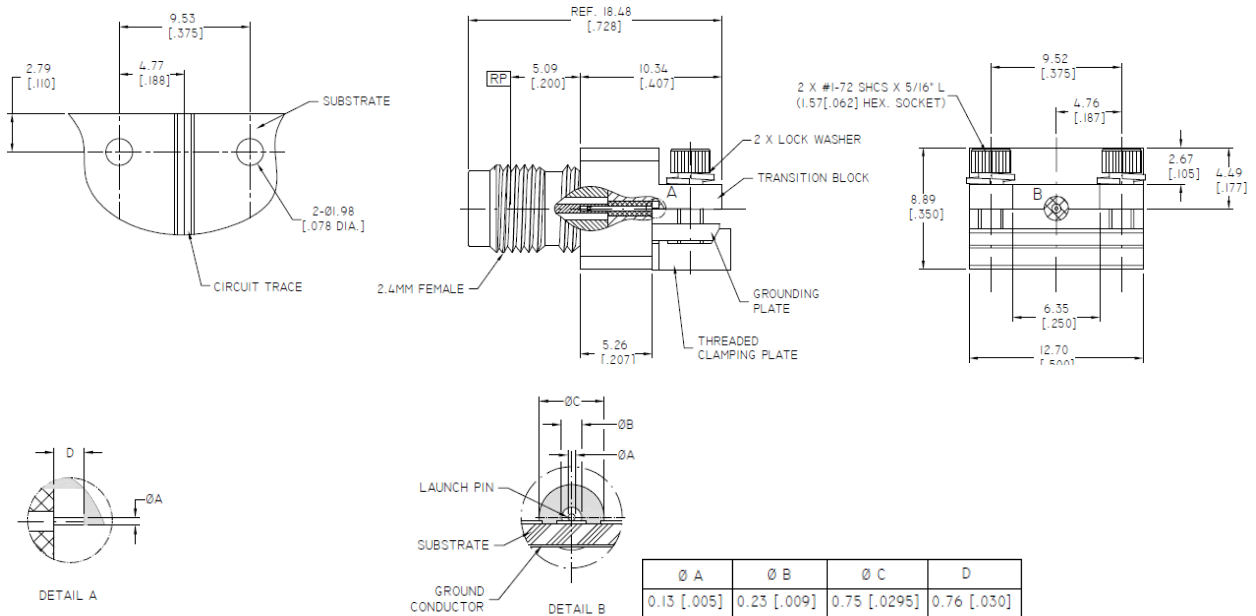

Dimensions in mm. All specifications are subject to change without notice.

2.4MM CONNECTOR

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: PEI

TRANSITION BLOCK

1. TRANSITION BLOCK: BRASS, NICKEL PLATED
2. THREADED CLAMPING PLATE: BRASS, NICKEL PLATED
3. LAUNCH PIN: BERYLLIUM COPPER ALLOY, GOLD PLATED
4. TRANSITION BLOCK DIELECTRIC: PTFE

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -55°C to +125°C
2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC-50 GHz

Telephone: 978-772-3767 Fax: 978.772.3768 Email: info@responsemicrowave.com

www.responsemicrowave.com