




94 JACKSON ROAD SUITE#110 DEVENS, MA 01434

27GHz SMA CONNECTORS

Model *RMC.270.12.EL3.030*

Female Edge Launch

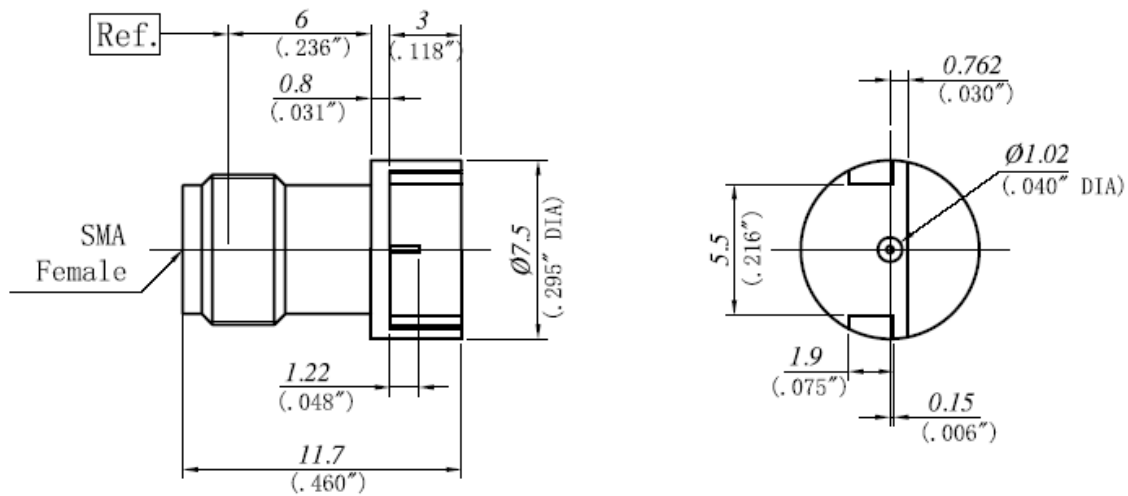

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-27GHz
VSWR, DC-27GHz.... 1.20:1 (Max)
Insertion Loss: 0.25dB(Max)

Materials/Finishes:

Housing: Brass
Gold Plated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI & PTFE

All specifications are subject to change without notice.

Telephone: 978-772-3767 Fax: 978.772.3768 Email: info@responsemicrowave.com
www.responsemicrowave.com