




94 JACKSON ROAD SUITE#110 DEVENS , M A 0 1 4 3 4

2.92mm CONNECTORS

Model *RMC.290.12.TH1*

Female Thread-in

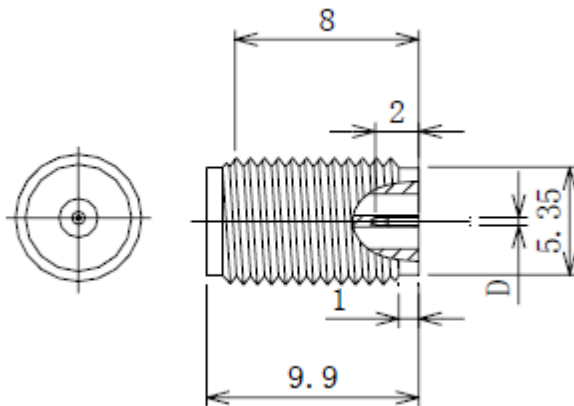

D = 0.30mm (0.012")

Performance Features:

Nominal Impedance: 50 Ω
Frequency Range: DC-40GHz
VSWR, DC-40GHz, ... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 Fax: 978.772.3768 Email: info@responsemicrowave.com
www.responsemicrowave.com