




94 JACKSON ROAD SUITE#110 DEVENS, MA 01434

2.92mm CONNECTORS

Model *RMC.290.20.4H1*

Female 4-hole flange

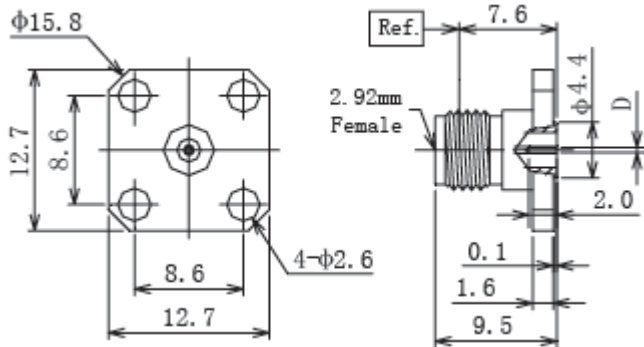


D = 0.510mm (0.020")

Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-40GHz
VSWR: DC-40GHz... 1.15:1 (Max)

Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PTFE&PEI



2.92mm Female (mm)		
LTR	MINIMUM	MAXIMUM
A	5.324	5.400
B	4.60	4.63
C	0.8	0.9
D	1.26	1.28
E	0	0.078
F	1.855	1.993
G	5.3	----

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 Fax: 978.772.3768 Email: info@responsemicrowave.com
www.responsemicrowave.com