94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Electromechanical Line Stretcher

Model RMLS.18000Sff **SMA female/female**

Frequency Range (GHz) FL-Fu	Insertion Loss (dB max)	Impedance	VSWR (max)	Phase Variation (°/GHz)
DC-18000	0.2 + 0.04/f	50 Ω	≤ 1.35:1	15

Notes:

a. **Connector: SMA female/female**
b. **Operation temperature: -65°C to +125°C**
c. **Case material: SS/P**

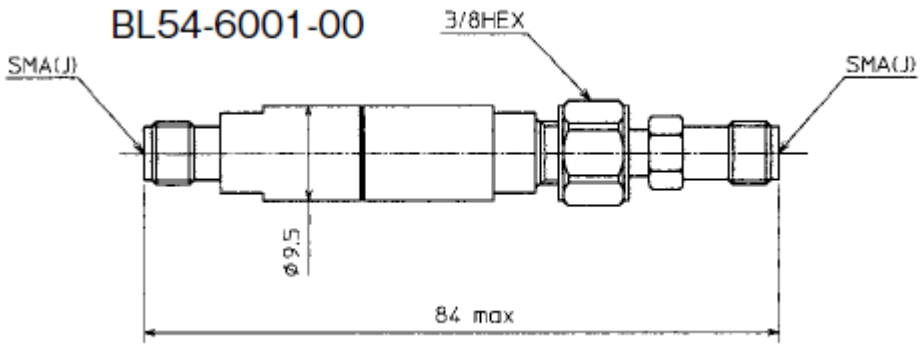

All specifications are subject to change without notice. Dimensions: mm

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 8/27/05