94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Electromechanical Line Stretcher

Model RMLS.40000.292mf 2.92mm male/female

Frequency Range (GHz) FL-Fu	Insertion Loss (dB max)	Delay (PS max)	VSWR (max)	Phase Variation (PS/turn)
DC-40	1.0	60	≤ 1.4:1	1.7

Notes:

a. **Connector: 2.92mm female/male**
b. **Impedance: 50 Ω**
c. **Operation temperature: -65°C to +125°C**
d. **Case material: SS/P**

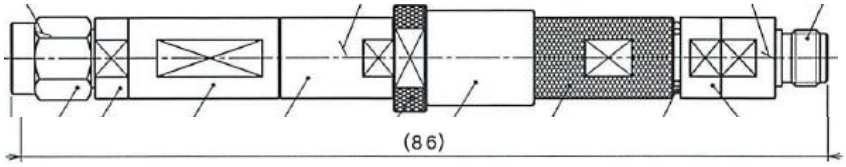

All specifications are subject to change without notice. Dimensions: mm

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 10/3/15