94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Electromechanical Phase Shifter

Model RMPS.18000Sf SMA female

Frequency Range (GHz) FL-Fu	Insertion Loss (dB max)	Impedance	VSWR (max)	Phase Variation (deg/GHz)
DC-18000	0.25	50 Ω	≤ 1.15:1	53

Notes:

a. **Connector: SMA female**
b. **Operation temperature: -40°C to +105°C**
c. **Case material: aluminum w/golden iridite**
d. **Power: 50W CW**

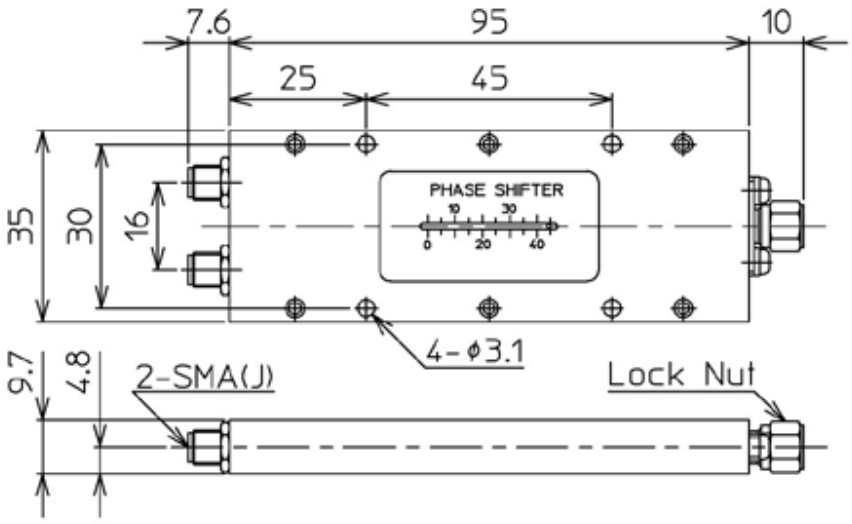

All specifications are subject to change without notice. Dimensions: mm

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 8/27/05