94 JACKSON ROAD, STE 110, DEVENS, MA 01434

Power Divider

Model RMPD10.5000-6000Sf 10-way, SMA female

Frequency	Insertion Loss	Isolation	Phase Unbalance	Amplitude Unbalance	VSWR
5-6GHz	1.8dB max	17dB min	+/-8º max	+/-0.8dB max	1.6:1max

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female 11places**
c. **Power: 30W max forward, 1W max**
d. **Case material: Aluminum alloy w/black paint**
e. **Operation temperature: -55°C to +85°C**

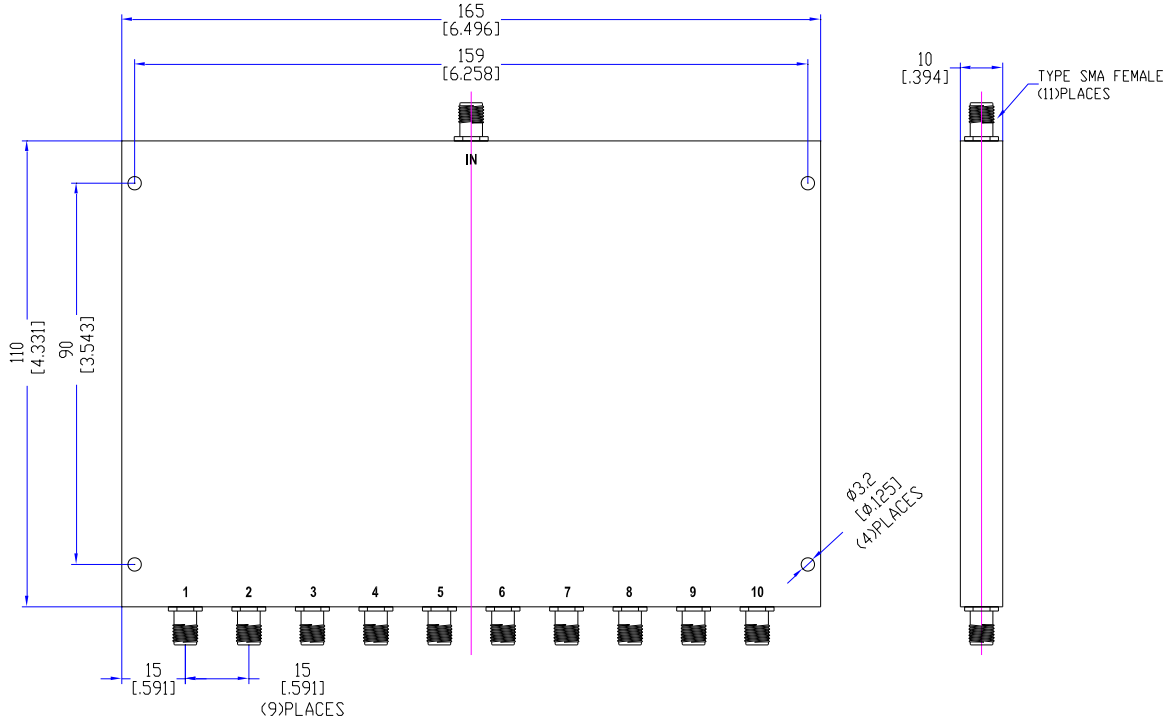

Dimensions in mm(inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978.772.3768**

www.responsemicrowave.com

Rev 7/11/15