



94 JACKSON ROAD, STE 110, DEVENS, MA 01434

Power Divider / Splitters


Model RMPD10.800-2500Sf

10-way Power Diver SMA female

Frequency	Insertion Loss	Isolation	Phase Unbalance	Amplitude Unbalance	VSWR
800-2500MHz	2dB typ	18dB min	12° max	0.8 dB max	1.5:1max

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 11places
- Output Power: ≤ 30 W
- Case material: Aluminum alloy w/black paint
- Operation temperature: -35C to +85C deg

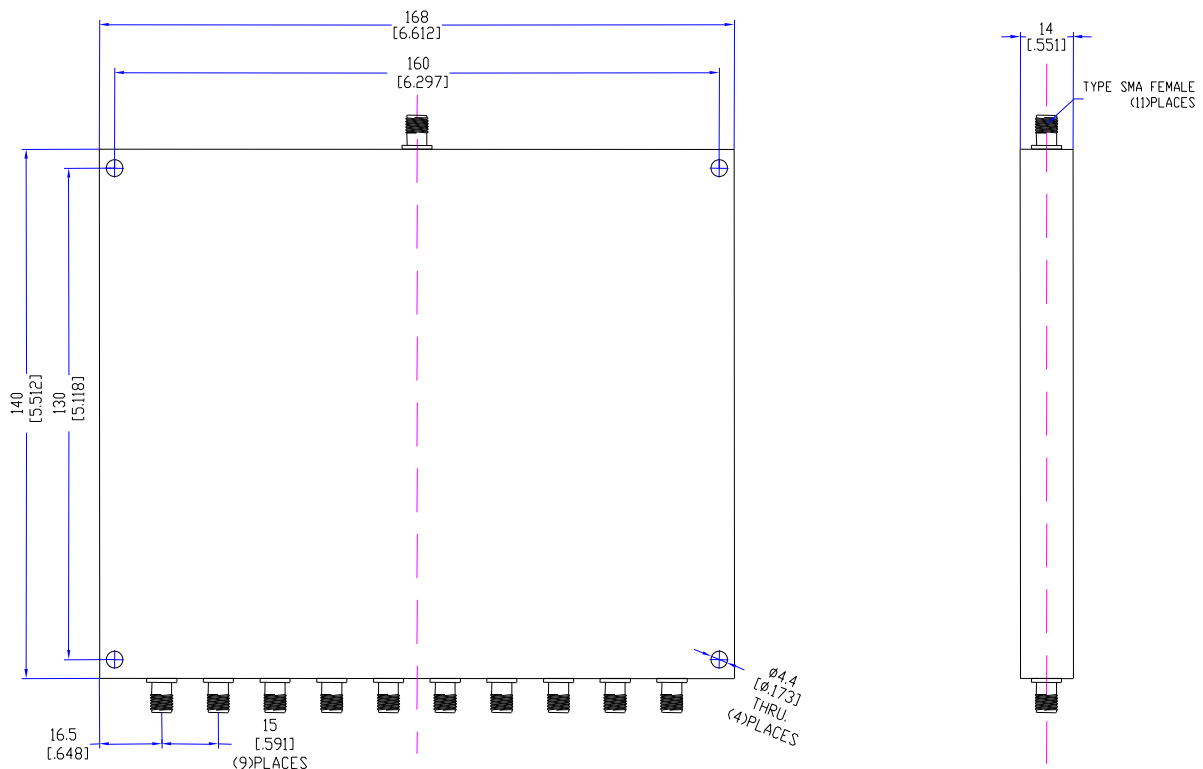

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978.772.3768

www.responsemicrowave.com