



94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers


Model RMPD12-2-20Sf

12 way Power Divider

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
2–20GHz	3.9dB max	16dB min	1.7:1 max	10° max	+/-1 dB max

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (13)places
- Forward Power: $\leq 20W$, Reverse: $\leq 1W$ / Peak 3KW
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55°C to +105°C

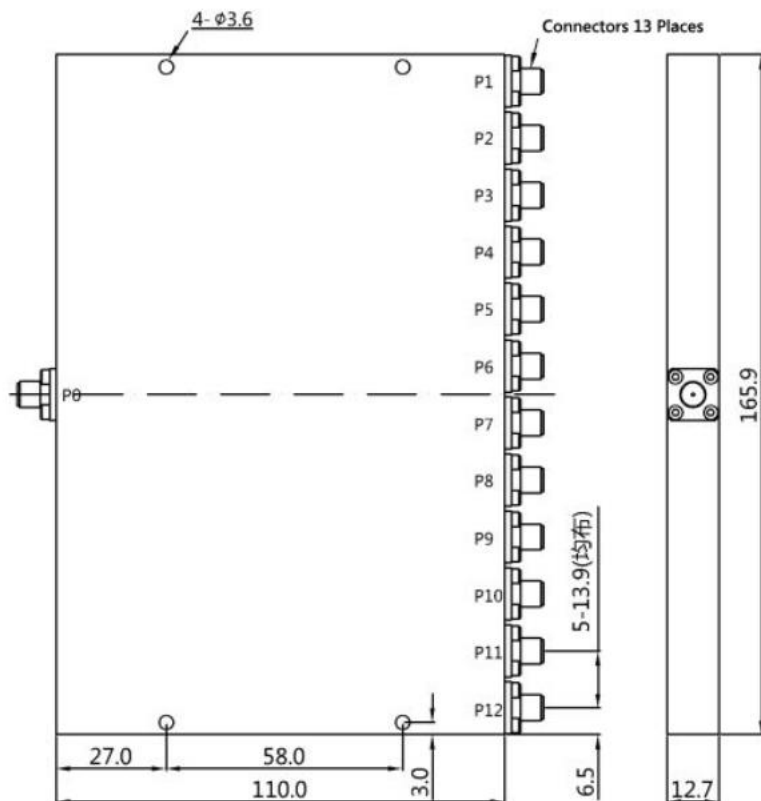

Note: Unit: mm, Unless otherwise specified, .Outline drawing +/-0.2mm; Hole +/-0.1mm
All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com