94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers

Model RMPD12-800-2500Sf 12 way Power Divider SMA female

Frequency	Insertion Loss	Isolation	VSWR	Phase Unbalance	Amplitude Unbalance
0.8–2.5GHz	0.8typ/1.5dB max	20dB min	1.3:1 typ	15° max	1.6 dB max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female
c. Forward Power: ≤ 50W, Reverse: ≤ 1W
d. Case material: Aluminum alloy
e. Operation temperature: -35C to +85C deg

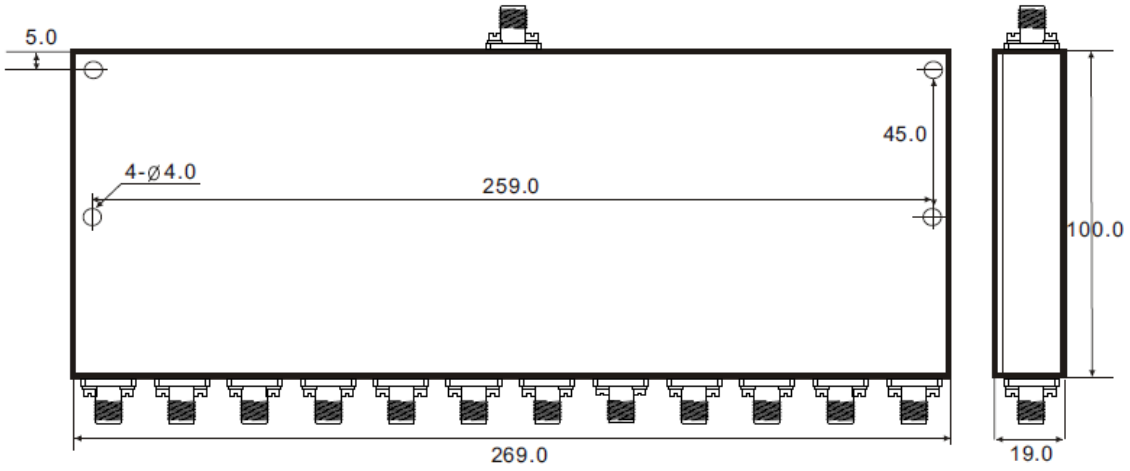

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 11/29/10