94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers

Model RMPD16-02-30Sf — 16 way, SMA female

Frequency	Insertion Loss	Isolation	Phase Unbalance	Amplitude Unbalance
2 – 30 MHz	0.8typ/1.7dB max	20dB min	15º max	1.0 dB max

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female**
c. **Forward Power: ≤ 25 W**
d. **Case material: Aluminum alloy**
e. **Operation temperature: -35°C to +85°C**

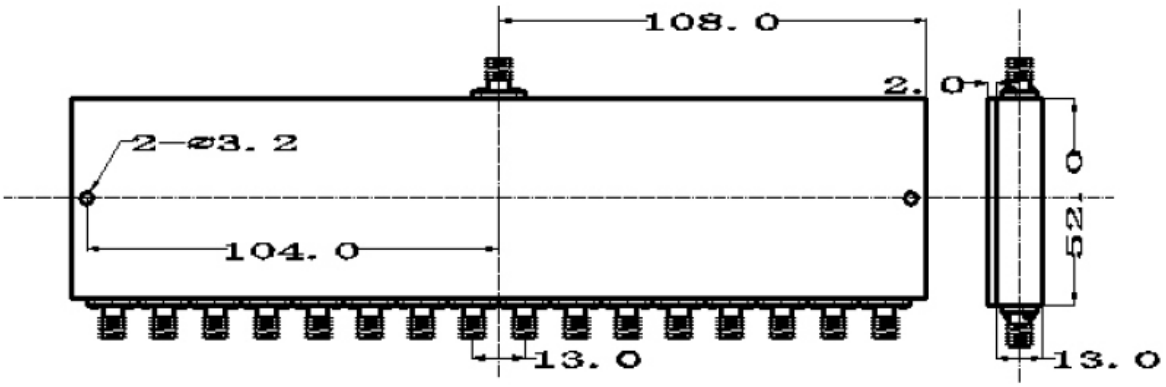

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 5/20/09