



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD16.1000-2000Sf


16-Way, SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
1-2 GHz	1.6dB max	+/-6° max	1.5:1 max 1.3:1 typ	1.6dB max 0.8dB typ	18dB min 23dB typ

Notes:

- Input and output impedance: 50 Ohms
- Connector: In = N female x 1, Out = N female x 16
- Power: 35W forward, 1W reverse
- Case material: Aluminum alloy clear iridite finish
- Operation temperature: -35C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

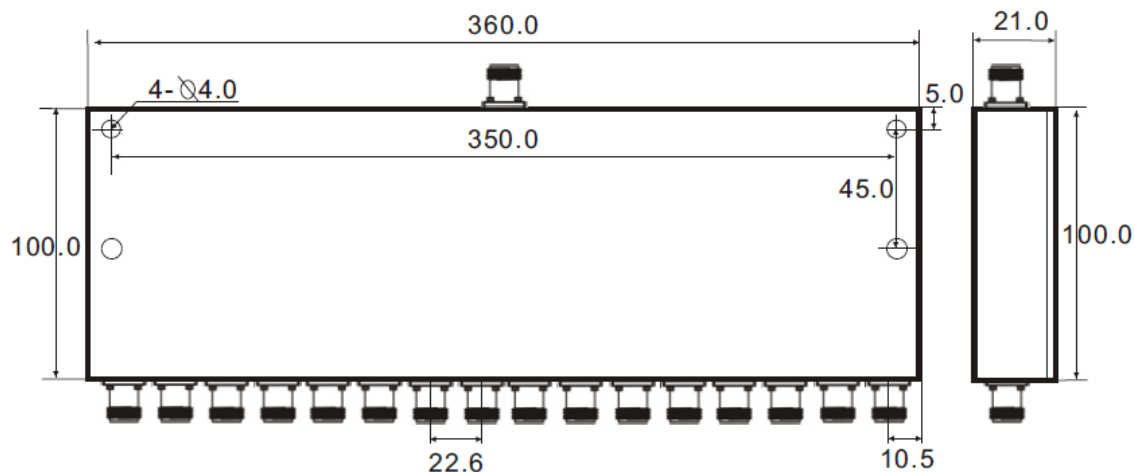

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com