



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Combiner/Divider


Model RMPD16.2-32.292f

16-Way, 0° 2.92mm female

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR       | Insertion Loss | Isolation |
|-----------|---------------------|-----------------|------------|----------------|-----------|
| 2-32 GHz  | 0.9dB max           | +/-12° max      | 1.70:1 typ | 6.8dB typ      | 15dB min  |

**Notes:**

- Input and output impedance: 50 Ohms
- Connector: 2.92mm female 17 places
- Power: Forward: 30W CW Reverse: 0.5W
- Case material: Aluminum alloy w/black paint
- Operation temperature: -55C to +85C deg

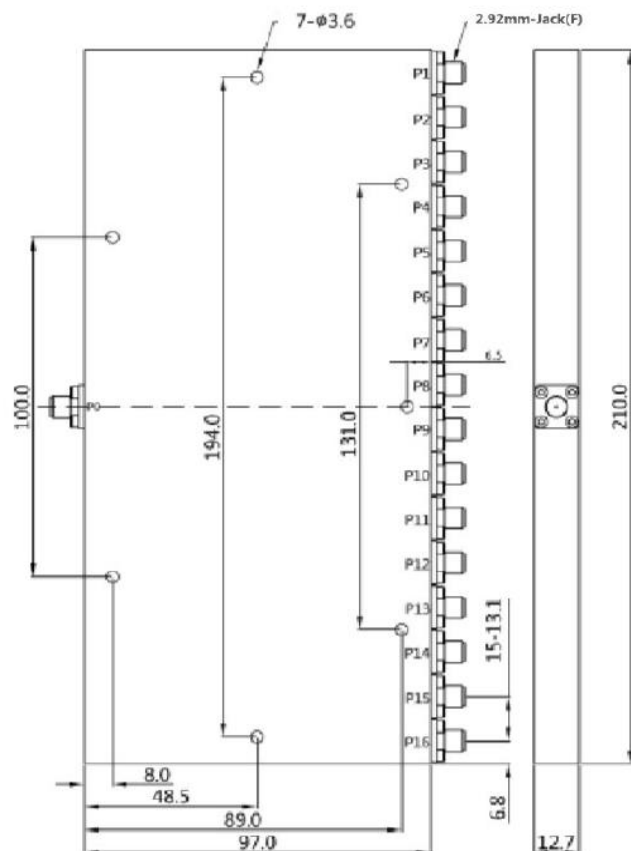

**Note:** Unit: mm, Unless otherwise specified, .Outline drawing +/-0.2mm; Hole +/-0.1mm

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)