



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Combiner/Divider


Model RMPD16.2000-4000Sf

16-Way, SMA female

| Frequency | Amplitude Unbalance | Phase Unbalance | VSWR      | Insertion Loss | Isolation |
|-----------|---------------------|-----------------|-----------|----------------|-----------|
| 2–4 GHz   | 0.5dB max           | +/-5° max       | 1.4:1 max | 1.5dB max      | 20dB min  |

**Notes:**

- Input and output impedance: 50Ω
- Connector: SMA female, SS/P, 17places
- Power: 30W forward, 1W reverse
- Case material: Aluminum alloy with black paint
- Operation temperature: 55°C to +85°C

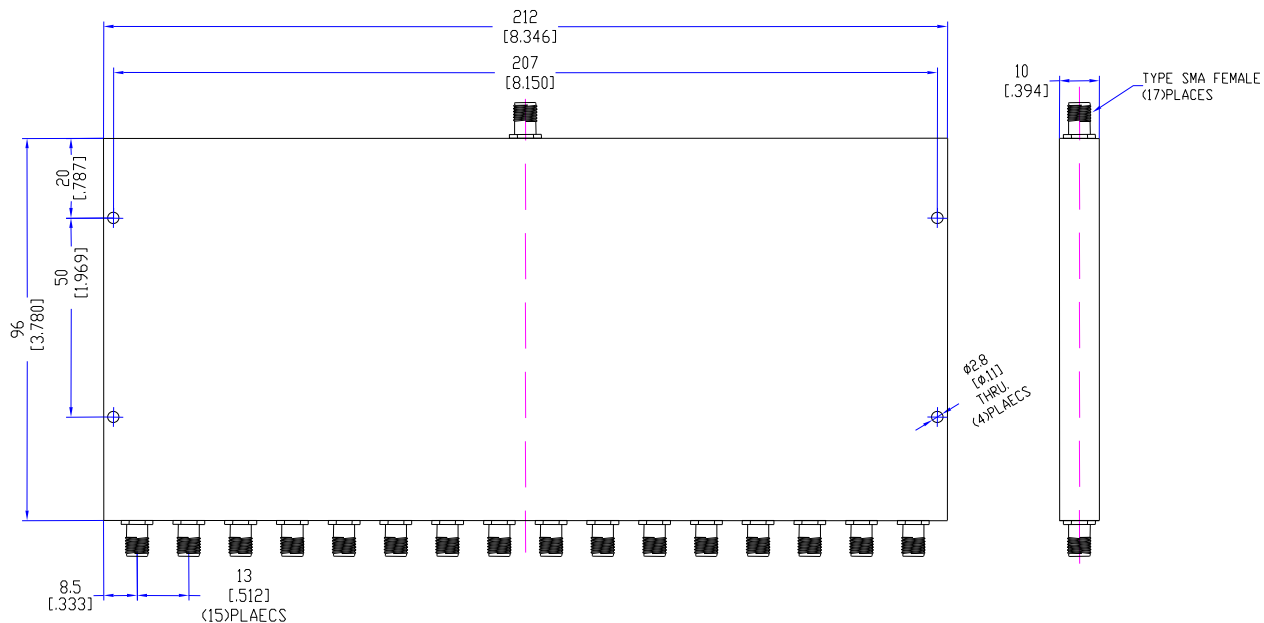

Dimensions in mm(inches). All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)